

WELL LOCATION

County LICKING Township UNION

Owner/Builder THERESA BAXTER
(Circle One or Both) First Last

Address of Well Location 2300 DEEDS RD
Number Street Name

City GRANVILLE Zip Code +4 3023

Permit No. 9508 Section/Lot No. -
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well SINGLE FAMILY HOME


N X N40° 00.597 +/- ft. or m
S Y W082° 32.440 +/- ft. or m

Elevation of Well 870. +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source GPS

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat N40° 00.597 Long W082° 40

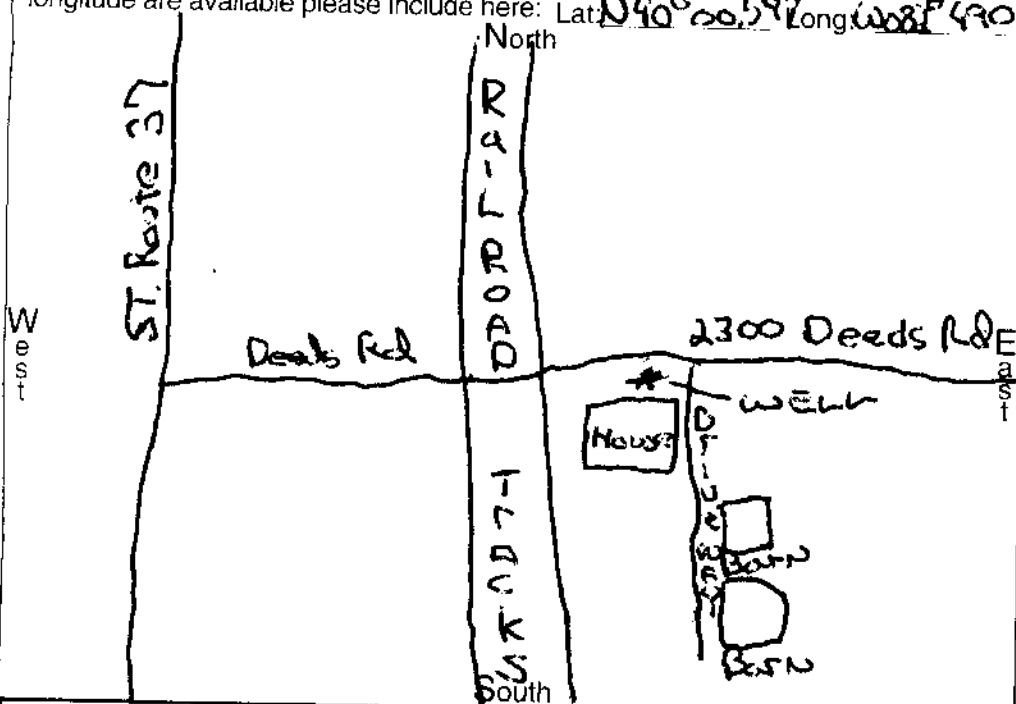

WELL TEST*

Pre-Pumping Static Level 80 ft. Date 8-23-10

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 12 gpm Duration of Test 2 hrs.

Feet of Drawdown 10 ft. Sustainable Yield 12 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality -

PUMP/PITLESS

Type of pump SUBMERSIBLE Capacity 12 gpm

Pump set at 140 ft. Pitless Type MERRILL CLEARWAY

Pump installed by HARRY A. BEVARD JR

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm H & A BEVARD WATER WELL DRILLING

Address 3066 MARTINSBURG RD

City, State, Zip NEWARK, OHIO 43055

Signed Harry A Bevard Jr Date 4-4-12

ODH Registration Number 1039

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☒ Borehole Diameter 5 1/2 inches Depth 118 ft.

Casing Diameter 5 1/2 in. Length 118 ft. Thickness 250 in.

2 ☒ Borehole Diameter 5 inches Depth 235 ft.

Casing Diameter 5 in. Length 14 ft. Thickness 14 in.

Casing Height Above Ground 14 ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 5 Slot Size 1/4 Screen Length 118 ft.

Type 1 Material 1

Set Between 0 ft. and 118 ft.

GRAVEL PACK (Filter Pack)

Material/Size 20-40 Volume/Weight Used 200 lbs

Method of Installation Dry Driven

Depth: Placed FROM 0 ft. TO 118 ft.

GROUT

Material Benseal Volume/Weight Used 200 lbs

Method of Installation Dry Driven

Depth: Placed FROM 0 ft. TO 118 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Top Soil	0	2
light Brown Clay	2	23
Gray Clay / Gravel	23	30
Gray Clay	30	68
Gray Clay / Sand	68	116
Gray Shandy Shale	116	225
Gray Sandstone	225	235

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 8-23-10 Total Depth of Well 235 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.
ORIGINAL COPY TO - ODNr, DIVISION OF WATER, 2045 MORSE ROAD, COLS., OHIO 43229-6605
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy