

WELL LOG AND DRILLING REPORT

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 2045 Morse Road

Columbus, Ohio 43229-6605 Voice (614) 265-6740 Fax (614) 265-6767

1007369

WELL LOCATION

County GUERNSEY Township Oxford

Owner/Builder DAVID ROBINSON
(Circle One or Both) First Last

Address of Well Location 65028 Intersville Rd.
Number Street Name

City QUAKER CITY, OH Zip Code +4 43773

Permit No. 18 Section/Lot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well

N ☐ X ☐ +/- ft. or m

S ☐ Y ☐ +/- ft. or m


Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

North

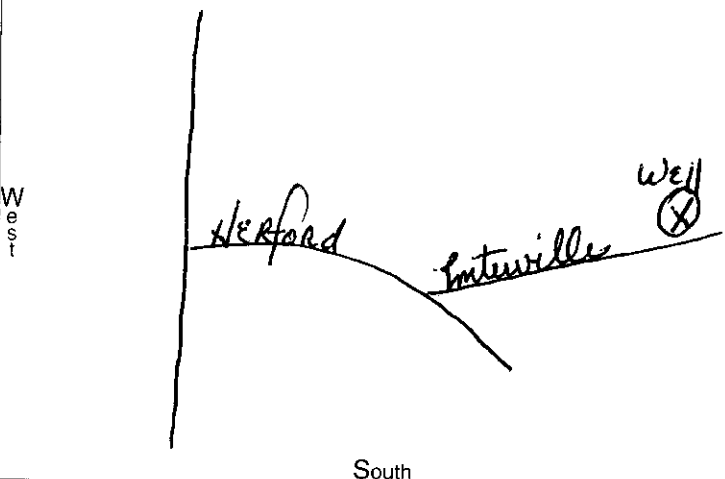

WELL TEST*

Pre-Pumping Static Level 38 ft. Date 5/21/09

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☒ Air ☐ Bailing ☐ Pumping* ☐ Other

Test Rate 20 gpm Duration of Test 4 hrs.

Feet of Drawdown 10 ft. Sustainable Yield 10 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ No

Quality

PUMP/PITLESS

Type of pump Capacity gpm

Pump set at ft. Pitless Type

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm J+M WATER

Address 14661 CLARY RD.

City, State, Zip Kimberlin, OH 43749

Signed Mary Linnell Date 4/3/09

ODH Registration Number 3064

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 10 inches Depth 162 ft. Thickness 5 in.

Casing Diameter 5 in. Length 162 ft. Thickness 5 in.

2 ☐ Borehole Diameter 10 inches Depth 162 ft. Thickness 5 in.

Casing Diameter 5 in. Length 162 ft. Thickness 5 in.

Casing Height Above Ground 2 ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☒ Solvent 2 ☐ Other

SCREEN

Diameter 1/4 x 4" Slot Size 1/4 x 4" Screen Length 115 ft.

Type Slotted Material PVC

Set Between 35 ft. and 150 ft.

GRAVEL PACK (Filter Pack)

Material/Size 8-16 Volume/Weight Used 800 lb

Method of Installation

Depth: Placed FROM 0 ft. TO 36 ft.

GROUT

Material Whole Plug Volume/Weight Used 800 lb

Method of Installation Gravity Flow

Depth: Placed FROM 0 ft. TO 36 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Red Shale	0	38
water	38	
Gray Shale	38	55
Hard limestone	55	65
Red Shale	65	90
Light Gray Shale	90	130
Black Gray Shale	130	160

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 5/21/09 Total Depth of Well 160 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 2045 MORSE ROAD, COLS., OHIO 43229-6605

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy