

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources
Division of Soil and Water Resources, 2045 Morse Road Building B
Columbus, Ohio 43229-6693 Voice (614) 265-6740 Fax (614) 265-6767

WELL LOCATION

County Stark Township Jackson
Owner/Builder Kirt Stout
(Circle One or Both) First Last
Address of Well Location 10027 Cliffview
Number Street Name

City North Canton Zip Code +4
Permit No. 24255 Section/Lot No.
(Circle One or Both)


Location of Well in State Plane coordinates, if available: Use of Well domestic

N ☐ X +/- ft. or m
S ☐ Y +/- ft. or m
Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

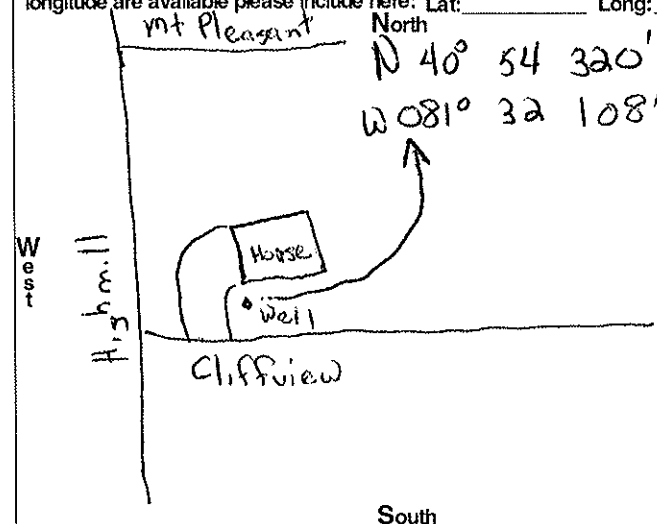

WELL TEST*

Pre-Pumping Static Level 50 ft. Date 3-8-14
Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other
☒ Air ☐ Bailing ☐ Pumping* ☐ Other
Test Rate 20 gpm Duration of Test 4 hrs.
Feet of Drawdown 10 ft Sustainable Yield 18 gpm
(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No
Quality Clear

PUMP/PITLESS

Type of pump Submersible Capacity 15 gpm
Pump set at 100 ft Pitless Type Baker SAO
Pump installed by Hall Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Hall Drilling
Address 1239 Whipple Ave SW
City, State, Zip Canton OH 44710

Signed [Signature] Date 3-10-14
ODH Registration Number 3297

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
1 ☐ Borehole Diameter 10 inches Depth 25 ft.
Casing Diameter 8 in. Length 25 ft Thickness SDR-21
2 ☐ Borehole Diameter 8.5 inches Depth 57 ft.
Casing Diameter 5 in. Length 58 ft Thickness SDR-21
Casing Height Above Ground 1.5 ft.
Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐
2 ☐ 2 ☐ 2 ☒ 2 ☐ Other
Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐
2 ☐ 2 ☐ 2 ☒ 2 ☐ Other

SCREEN

Diameter 10 / A Slot Size Screen Length ft.
Type Material
Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size 10 / A Volume/Weight Used
Method of Installation
Depth: Placed FROM ft. TO ft.

GROUT

Material Bentonite Volume/Weight Used 220 lbs
Method of Installation Tremie
Depth: Placed FROM Surface ft. TO 58 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.		From	To
Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.			
Clay & gravel		0'	15'
Boulders + cobbles		15'	25'
Boulder lime stony		25'	30'
Grey Shale		30'	45'
Dark Grey shale		45'	50'
Grey shale hard		50'	75'
Grey shale sandy		75'	85'
Grey white sandrock		85'	95'
White sandrock		95'	105'
Grey hard shale		105'	125'
Water @ 95'			
Water @ 105'			
Water @ 110'			

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 3-8-2014 Total Depth of Well 125 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy