DNR 7002.10

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Divison of Soil and Water Resources, 2045 Morse Road Building B
Columbus, Ohio 43229-6693 Voice (614) 265-6740 Fax (614) 265-6767

1017512

WELL LOCATION

County ASHLAND Township ORANGE

Owner/Builder (Circle One or Both) Betty (First) Ellison (Last)

Address of Well Location 1006 (Number) TR 975 (Street Name)

City ASHLAND Zip Code +4 44805

Permit No. Section/Lot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well Household

N ☐ X 40° 54 . 847 +/- 27 ft. or m

S ☐ Y 082 18 . 349 +/- 1 ft. or m

Elevation of Well 1011 . +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

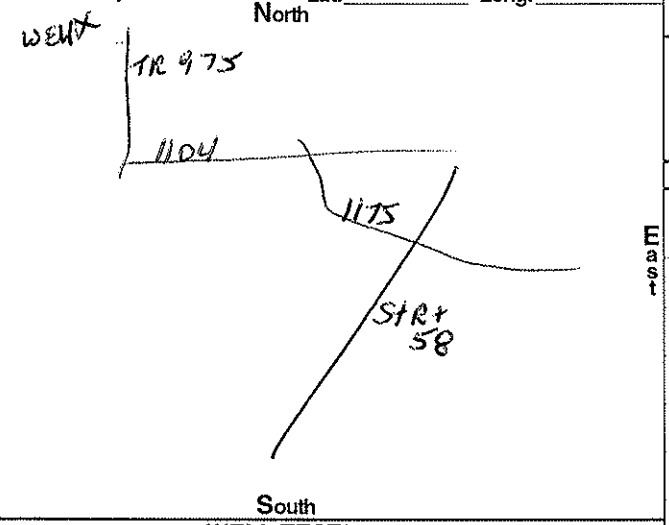

WELL TEST*

Pre-Pumping Static Level 20 ft. Date 6-1-15

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 10 gpm Duration of Test 72 hrs.

Feet of Drawdown 0 ft. Sustainable Yield 10 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☐ No

Quality CLEAR

PUMP/PITLESS

Type of pump SUB Capacity 10 gpm

Pump set at 88 ft. Pitless Type SIMMONS

Pump installed by REX DANELSON

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Rex Drilling

Address 1 CR 1950

City, State, Zip JEROMESVILLE OH 44840

Signed Rex Danelson Date 5-11-16

ODH Registration Number 588

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 5 inches Depth 98 ft.

Casing Diameter 5 in. Length 98 ft. Thickness .244 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 18 ± ft.

Type 1 ☒ Steel 2 ☐ 1 ☐ Galv. 2 ☐ 1 ☐ PVC 2 ☐ 1 ☐ 2 ☐ Other

Joints 1 ☒ Threaded 2 ☐ 1 ☐ Welded 2 ☐ 1 ☐ Solvent 2 ☐ 1 ☐ 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material BENSEAL Volume/Weight Used 200 LBS

Method of Installation DRY DRIVEN

Depth: Placed FROM 0 ft. TO 98 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED. Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.	From	To
BROWN SAND & GRAVEL	0	30
GRAY CLAY	30	39
GRAY CLAY & GRAVEL	39	96
GRAY SAND & GRAVEL	96	98

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 6-1-15 Total Depth of Well 98 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy