

WELL LOG AND DRILLING REPORT

1019235

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Soil and Water Resources, 2045 Morse Road Building B
Columbus, Ohio 43229-6693 Voice (614) 265-6740 Fax (614) 265-6767

WELL LOCATION

CONSTRUCTION DETAILS

County FULTON Township CLINTON

Owner/Builder STEVE RIEGSECKER
(Circle One or Both) First Last

Address of Well Location 18393 SH 2
Number Street Name

City WAUSEAN OH Zip Code +4 43567

Permit No. 30 Section/Plot No. 30
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well RESIDUAL IN

N ☐ X 765.9 ft. or m
S ☐ Y 19.6 ft. or m

Elevation of Well 765.9 ft. or m

Datum Plain: ☐ NAD27 ☒ NAD83 Elevation Source GPS

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☒ Borehole Diameter 5 inches Depth 180' ft.
Casing Diameter 5 in. Length 154 ft. Thickness .258 in.

2 ☐ Borehole Diameter _____ inches Depth _____ ft.
Casing Diameter _____ in. Length _____ ft. Thickness _____ in.

Casing Height Above Ground 2 ft.

Type 1 ☒ Steel 1 ☒ Galv. 1 ☐ PVC 1 ☐
2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐
2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

SCREEN

Diameter _____ Slot Size _____ Screen Length _____ ft.

Type _____ Material _____

Set Between _____ ft. and _____ ft.

GRAVEL PACK (Filter Pack)

Material/Size _____ Volume/Weight Used _____

Method of Installation _____

Depth: Placed FROM _____ ft. TO _____ ft.


GROUT

Material BENSEAL Volume/Weight Used 200/lbs

Method of Installation DRY DRIVEN

Depth: Placed FROM 0 ft. TO 152 ft.

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat N 41.54304 Long: W 084.21940

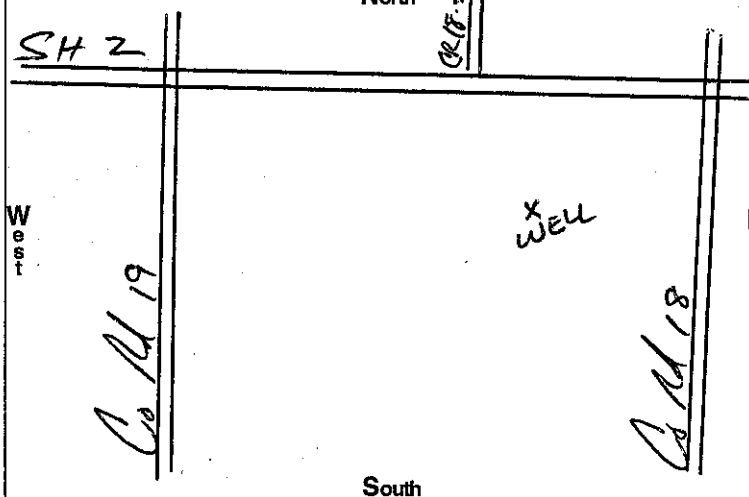

Material/Size _____ Volume/Weight Used _____

Method of Installation _____

Depth: Placed FROM _____ ft. TO _____ ft.

GROUT

Material BENSEAL Volume/Weight Used 200/lbs

Method of Installation DRY DRIVEN

Depth: Placed FROM 0 ft. TO 152 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

From To

SAND & STONES	0'	6'
LOOSE SANDY CLAY	6'	20'
CLAY	20'	84'
HARD PAN	84'	148'
BROKEN SHALE & WITTEN	148'	152'
BLACK SHALE	152'	180'

WELL TEST*

Pre-Pumping Static Level 75 ft. Date 5-18-18

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 5-6 gpm Duration of Test 2 hrs.

Feet of Drawdown 30 ft. Sustainable Yield 5-6 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality CLEAR

PUMP/PITLESS

Type of pump SUBMERSIBLE Capacity 5 gpm

Pump set at 176 ft. Pitless Type ADAPTER

Pump installed by WYSE WELL DRILLING

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm WYSE WELL DRILLING

Address Box 53033

City, State, Zip Piquette OH 43553

Signed [Signature] Date 7-15-18

ODH Registration Number 000352

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 7-15-18 Total Depth of Well 180 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy