


WELL LOCATION

County STARK Township SANDY
Owner/Builder ERIC CARBONE
Address of Well Location 6527 MORTICE
City WAYNSBURG Zip Code +4 44688
Permit No. 26772 Section/Lot No.
Location of Well in State Plane coordinates, if available: Use of Well SFD
N ☐ X +/- ft. or m
S ☐ Y +/- ft. or m
Elevation of Well 1221 +/- ft. or m
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source
Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 40.694229 Long: 81.283712
North

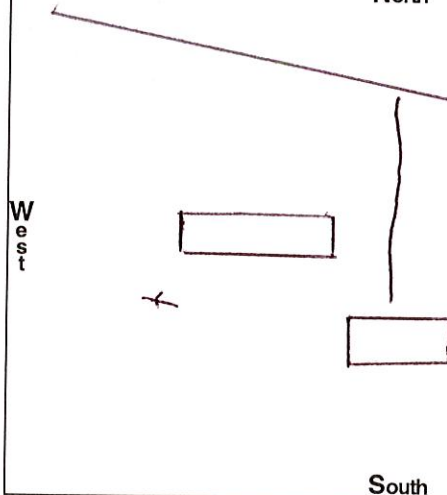

WELL TEST*

Pre-Pumping Static Level 120 ft. Date 8-1-22
Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other
☒ Air ☐ Bailing ☐ Pumping* ☐ Other
Test Rate 12 gpm Duration of Test 2 hrs.
Feet of Drawdown 0 ft. Sustainable Yield 12 gpm
*(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ No
Quality CLEAR

PUMP/PITLESS

Type of pump MYERS Capacity 10 gpm
Pump set at 300 ft. Pitless Type SIMMONS
Pump installed by WILLIAMS DRILLING

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm WILLIAMS DRILLING CO.

Address 15255 STANWOOD SW

City, State, Zip DALTON, OHIO 44618

Signed [Signature] Date 8-8-21

ODH Registration Number 2212

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
1 ☒ Borehole Diameter 9 3/8 inches Depth 200 ft.
Casing Diameter 5 in. Length 200 ft. Thickness SDR-21 in.
2 ☐ Borehole Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground ft.
Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐
2 ☐ 2 ☐ 2 ☐ 2 ☐ Other
Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐
2 ☐ 2 ☐ 2 ☐ 2 ☐ Other
SCREEN
Diameter Slot Size Screen Length ft.
Type Material
Set Between None ft. and ft.
GRAVEL PACK (Filter Pack)
Material/Size Volume/Weight Used
Method of Installation None
Depth: Placed FROM None ft. TO ft.
GROUT
Material BEANSEAL SLURRY Volume/Weight Used 420 GALLONS
Method of Installation TRENCH
Depth: Placed FROM 200 ft. TO SURFACE ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED. Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.		From	To
Fill		0	10
HARD PAN		10	18
SOFT SHALE		18	55
Limestone		55	59
COAL		59	64
SANDY SLATE		64	121
LIMESTONE		121	127
BLACK SHALE		127	151
Limestone		151	156
DILY GRAY SANDSTONE		156	287
LT GRAY SANDSTONE		287	405
Water AT		61	391

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 8-1-22 Total Depth of Well 405 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy