


TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources
Division of Soil and Water Resources, 2045 Morse Road Building B
Columbus, Ohio 43229-6693 Voice (614) 265-6740 Fax (614) 265-6767

WELL LOCATION

County Putage Township Paris
Owner/Builder Vasim AshKarnie
Address of Well Location 10071 Halcomb Rd.
City Newton Falls OH Zip Code +4 44444
Permit No. 19185 Section/Lot No. (Circle One or Both)
Location of Well in State Plane coordinates, if available: Use of Well
N ☐ X 41° 11' 04.2" +/- ft. or m
S ☐ WY 081° 06' 40.6" +/- ft. or m
Elevation of Well 953 +/- ft. or m
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source
Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:
North

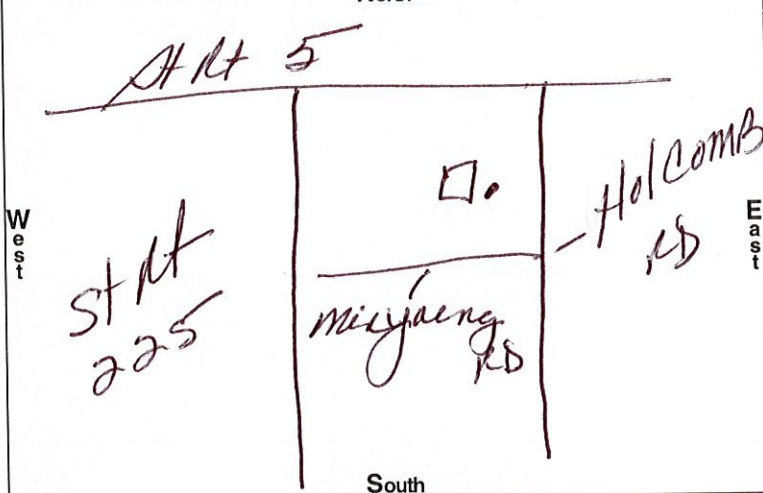

WELL TEST*

Pre-Pumping Static Level 14 ft. Date 12-23-19
Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other
☐ Air ☒ Bailing ☐ Pumping* ☐ Other
Test Rate 20 gpm Duration of Test 1 hrs.
Feet of Drawdown 6 ft. Sustainable Yield 18 gpm
(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No
Quality Cloudy

PUMP/PITLESS

Type of pump 1/2 hp Sub Capacity 10 gpm
Pump set at 33 ft. Pitless Type Simmons
Pump installed by Jim Templeton
I hereby certify the information given is accurate and correct to the best of my knowledge.
Drilling Firm Templeton Well Drill
Address 6703 Fairbairn Rd
City, State, Zip Rootstown OH 44272
Signed Jim Templeton Date 1-1-19
ODH Registration Number 6076

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
1 ☐ Borehole Diameter 5 inches Depth 65 ft.
Casing Diameter 5 in. Length 28 ft. Thickness 1/4 in.
2 ☐ Borehole Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground ft.
Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other
2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other
Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other
2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other
SCREEN
Diameter Slot Size Screen Length ft.
Type Material
Set Between ft. and ft.
GRAVEL PACK (Filter Pack)
Material/Size Volume/Weight Used
Method of Installation
Depth: Placed FROM ft. TO ft.
GROUT Bentonite Volume/Weight Used 100/135
Material Method of Installation Dry Pack
Depth: Placed FROM 0 ft. TO 27 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.		From	To
Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.			
<u>Sandy Clay</u>		<u>0</u>	<u>21</u>
<u>Sand & gravel</u>		<u>21</u>	<u>24</u>
<u>Broken Sand stone</u>		<u>24</u>	<u>27</u>
<u>White Sand stone</u>		<u>27</u>	<u>65</u>

(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 12-23-19 Total Depth of Well 65 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy