

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Soil and Water Resources, 2045 Morse Road Building B
Columbus, Ohio 43229-6693 Voice (614) 265-6740 Fax (614) 265-6767

1022550

WELL LOCATION

County CARROLL Township CENTER

Owner/Builder G F FARMS FLP
(City/One or Both) First Last

Address of Well Location 510 STEUBENVILLE RD SE
Number Street Name

City CARROLLTON Zip Code +4 44615

Permit No. 72-2024 Section/Lot No. 25
(Section One or Both)

Location of Well in State Plane coordinates, if available: Use of Well 1 FAM DWELLING

N ☐ X +/- ft. or m


S ☐ Y +/- ft. or m

Elevation of Well 1128 +/- 0 or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source GOOGLE EARTH

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other GOOGLE EARTH

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 40° Long: 81°

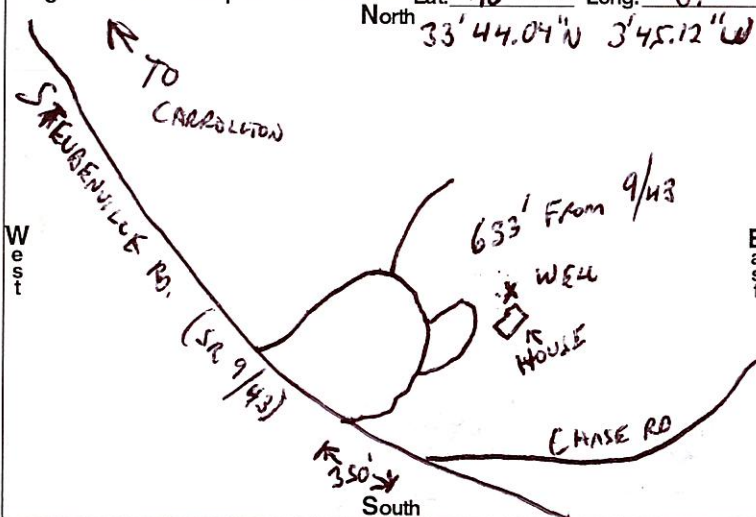

WELL TEST*

Pre-Pumping Static Level 101 ft. Date 5-14-25

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 30 gpm Duration of Test 1 hrs.

Feet of Drawdown 10 ft. Sustainable Yield 30+ gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality CLEAR, NO ODOOR, NO IRON

PUMP/PITLESS

Type of pump STAIR-RITE CONST. PRES. SUB. Capacity 20 gpm

Pump set at 246 ft. Pitless Type DICKENS PULL THRU

Pump installed by SPEEDY DRILLING CO. LLC

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm SPEEDY DRILLING CO. LLC

Address 3100 MACAW RD NE

City, State, Zip CARROLLTON OH 44615

Signed C. P. Fry Date 8-23-25

ODH Registration Number 135

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 9 3/4 inches Depth 138 ft.

Casing Diameter 6 5/8 in. Length 140 ft. Thickness 0.21 in.

2 ☐ Borehole Diameter 5 7/8 inches Depth 256 ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 1 1/2 ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material WYOMING GROUT Volume/Weight Used 308 GAL H2O + 700# ORG

Method of Installation PRESSURE GROUT THRU 1" TRENCH

Depth: Placed FROM 138 ft. TO 0 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
FILL	0	9
LIMEY SAND ROCK	9	18
SOFT GRAY SHALE	18	32
BROWN SAND ROCK	32	40
GRAY SAND ROCK	40	45
DARK GRAY SHALE	45	52
DARK SAND ROCK	52	71
LIMEY SHALE	71	80
SANDY SHALE	80	103
SAND ROCK	103	120
DARK SHALE	120	126
LIGHT GRAY LIMEY SHALE	126	161
GRAY SAND ROCK	161	245
SANDY SHALE	245	256

H2O @ 95' & 120' HIGH HEAD
161' (76PM) 230' (2.5+ GPM)

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 5-19-25 Total Depth of Well 256 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy