

**TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD**

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources

**Division of Soil and Water Resources, 2045 Morse Road Building B
Columbus, Ohio 43229-6693 Voice (614) 265-6740 Fax (614) 265-6767**

1023676

WELL LOCATION

County Muskingum Township Washington

Owner/Builder JENNIE BRAYSON

Address of Well Location 3785 EAST GREENWOOD RD

City ZANESVILLE OHIO Zip Code +4 43701

Permit No. 611253 Section/Lot No.

Location of Well in State Plane coordinates, if available: Use of Well FAMILY DWELLING

N ☐ X ☐ ft. or m


S ☐ Y ☐ ft. or m

Elevation of Well ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 40.024831 North Long: 82.4098631

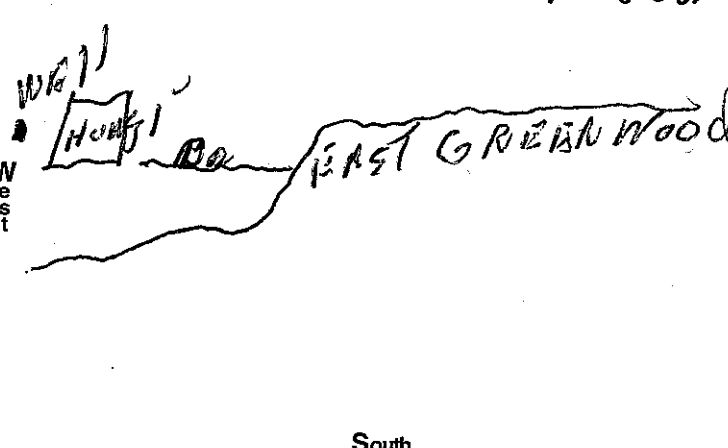

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 10 Borehole Diameter 10 inches Depth 31 ft.

2 6 Casing Diameter 6 in. Length 31 ft. Thickness 1/2 in.

2 140 Borehole Diameter 140 inches Depth 160 ft.

2 1/2 Casing Diameter 1/2 in. Length 140 ft. Thickness 1/2 in.

Casing Height Above Ground 1 FT ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐

2 ☐ 2 ☐ 2 ☒ 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐

2 ☐ 2 ☐ 2 ☒ 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material BENTONITE Volume/Weight Used 11 BAGS 550

Method of Installation POURED IN

Depth: Placed FROM 0 ft. TO 30 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Top soil BROWN	0	5
GRAY CLAY	5	10
GRAY SHALE	10	35
GRAY SANDSTONE	35	85
GRAY SHALE	85	100
WHITE SANDSTONE	100	130
SHALE GRAY	130	160

WATER AT 53 FT

WELL TEST*

Pre-Pumping Static Level 40 ft. Date 5-26-24

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 10 gpm Duration of Test 1 hrs.

Feet of Drawdown 100 ft. Sustainable Yield 4 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☒ Yes ☐ No

Quality Clear

PUMP/PITLESS

Type of pump SUBMERSIBLE Capacity 10 gpm

Pump set at 150 ft. Pitless Type Pull-through

Pump installed by RYAN GARRETT

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm RYAN GARRETT

Address 8177 HOPEWELL NAT RD

City, State, Zip ZANESVILLE OHIO 43701

Signed Ryan Garrett Date 5-28-24

ODH Registration Number 01592

More space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 5-28-24 Total Depth of Well 160 ft.