

TYPE OR USE PEN  
SELF TRANSCRIBING  
PRESS HARD

# WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources  
Division of Soil and Water Resources, 2045 Morse Road Building B  
Columbus, Ohio 43229-6693 Voice (614) 265-6740 Fax (614) 265-6767

1023678

## WELL LOCATION

County Muskingum Township Union

Owner/Builder DIANA JACKSON  
(Circle One or Both) First Last

Address of Well Location 10145 Piddock Rd  
Number Street Name

City NORWICH Zip Code +4 43767

Permit No. 615536 Section/Lot No.   
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well FAMILY

N ☐ X  +/-  ft. or m


S ☐ Y  +/-  ft. or m

Elevation of Well  +/-  ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 39.99571 N Long: 81.79533 W

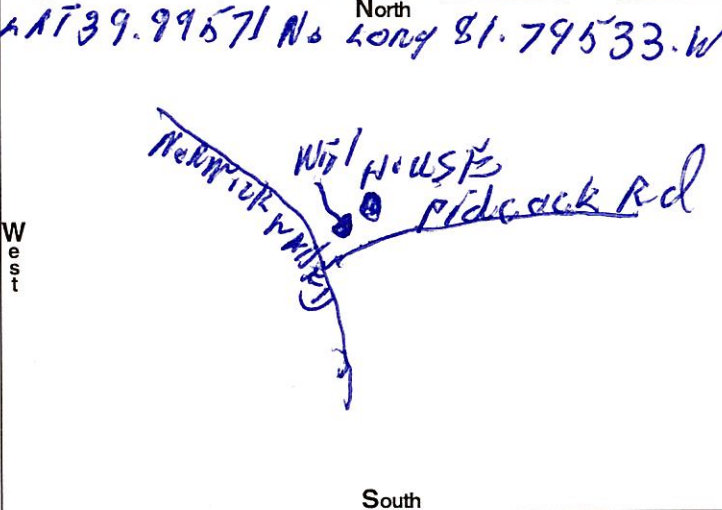

## WELL TEST\*

Pre-Pumping Static Level 50 ft. Date 7-8-2024

Measured from: ☐ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping\* ☐ Other

Test Rate 1 gpm Duration of Test 4 hrs.

Feet of Drawdown  ft. Sustainable Yield 8 gpm

\*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☐ No

Quality

## PUMP/PITLESS

Type of pump SUBMERSIBLE Capacity 10 gpm

Pump set at 140 ft. Pitless Type PULL-THROUGH

Pump installed by ROYER GARD

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm ROYER GARD

Address 3177 SUPERWELL RD

City, State, Zip ZANESVILLE OH 43701

Signed Roy Gard Date 9-14-24

ODH Registration Number 01592

## CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 6 inches Depth 30 ft.

Casing Diameter 6 in. Length 31 ft. Thickness 1/2 in.

2 ☐ Borehole Diameter 6 inches Depth 150 ft.

Casing Diameter 4 1/8 in. Length 130 ft. Thickness 1/2 in.

Casing Height Above Ground 12 ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐ Other

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter  Slot Size  Screen Length 1 ft.

Type  Material

Set Between  ft. and  ft.

GRAVEL PACK (Filter Pack)

Material/Size  Volume/Weight Used

Method of Installation

Depth: Placed FROM  ft. TO  ft.

GROUT

Material BEAUTIFUL Volume/Weight Used 650#

Method of Installation POURED IN

Depth: Placed FROM 0 ft. TO 30 ft.

## DRILLING LOG\*

| INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.                                                    |  | From | To  |
|-----------------------------------------------------------------------------------------------------|--|------|-----|
| Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc. |  |      |     |
| Top soil BROWN                                                                                      |  | 0    | 5   |
| SHALE BROWN                                                                                         |  | 5    | 15  |
| SHALE GRAY                                                                                          |  | 15   | 35  |
| SANDSTONE GRAY                                                                                      |  | 35   | 75  |
| SHALE GRAY                                                                                          |  | 75   | 100 |
| SANDSHALE GRAY                                                                                      |  | 100  | 150 |

WATER AT 55 FT

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF SOIL AND WATER RESOURCES, 2045 MORSE ROAD BLD. B, COLS., OHIO 43229-6693

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy