

# WELL LOG AND DRILLING REPORT

ORIGINAL

PLEASE USE PENCIL  
OR TYPEWRITER

**DO NOT USE INK.**

State of Ohio  
DEPARTMENT OF NATURAL RESOURCES  
Division of Water  
1562 W. First Avenue  
Columbus, Ohio 43212

No 370099

County Stark Township Sandy Section of Township 27  
Owner Rich Schaeppner Address 9919 Muckley Dr. Waynesburg Rd  
Location of property @ 1 mi SE. of Waynesburg on Muckley Dr. 44688

## CONSTRUCTION DETAILS

Casing diameter 5 1/8" OD Length of casing 41 1/2 ft  
Type of screen \_\_\_\_\_ Length of screen \_\_\_\_\_  
Type of pump Submersible  
Capacity of pump 3 HP.  
Depth of pump setting 228'  
Date of completion 2-27-80

## BAILING OR PUMPING TEST


Pumping Rate 5 G.P.M. Duration of test 2 hrs.  
Drawdown 13.5 ft. Date 2-26-80  
Static level-depth to water 105' ft.  
Quality (clear, cloudy, taste, odor) Cloudy  
Pump installed by Speedy Drilling Co

## WELL LOG\*

| Formations<br>Sandstone, shale, limestone,<br>gravel and clay | From          | To           |
|---------------------------------------------------------------|---------------|--------------|
| <u>Soil &amp; Clay</u>                                        | <u>0 Feet</u> | <u>8 Ft.</u> |
| <u>Clay</u>                                                   | <u>8'</u>     | <u>18'</u>   |
| <u>Broken Sandy Shale</u>                                     | <u>18'</u>    | <u>25'</u>   |
| <u>Brown Shale</u>                                            | <u>25'</u>    | <u>38'</u>   |
| <u>Gray Shale</u>                                             | <u>38'</u>    | <u>50'</u>   |
| <u>Sandy Shale</u>                                            | <u>50'</u>    | <u>80'</u>   |
| <u>Shale</u>                                                  | <u>80'</u>    | <u>100'</u>  |
| <u>Limestone</u>                                              | <u>100'</u>   | <u>105'</u>  |
| <u>Shale</u>                                                  | <u>105'</u>   | <u>160'</u>  |
| <u>Dark Shale</u>                                             | <u>160'</u>   | <u>180'</u>  |
| <u>Dark Sandy Shale</u>                                       | <u>180'</u>   | <u>200'</u>  |
| <u>Gray Sandy Shale</u>                                       | <u>200'</u>   | <u>215'</u>  |
| <u>Shale w/ sand stringers.</u>                               | <u>215'</u>   | <u>240'</u>  |
| <u>200' 4" perforated liner installed.</u>                    |               | <u>T.D.</u>  |

## SKETCH SHOWING LOCATION

Locate in reference to numbered  
State Highways, St. Intersections, County roads, etc.

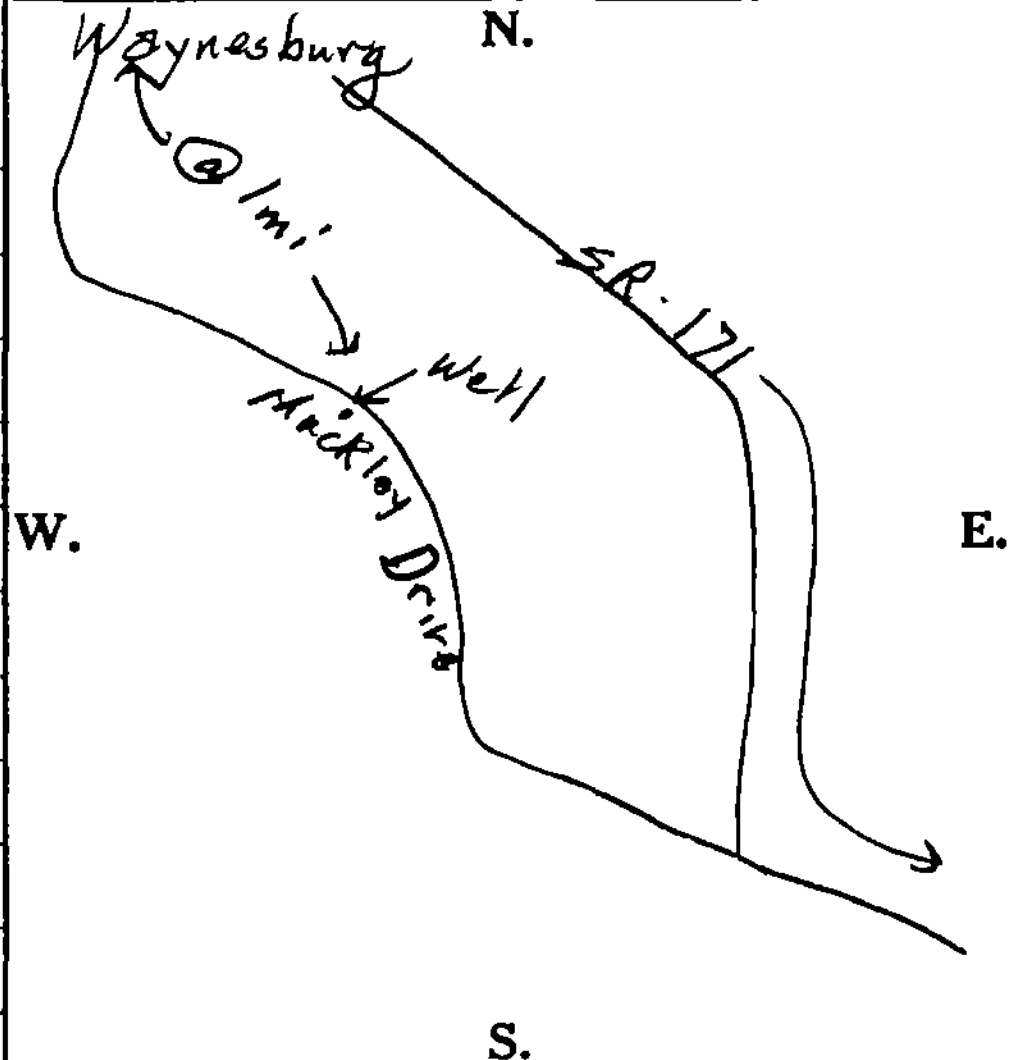

S.  
See reverse side for instructions

Drilling Firm Speedy Drilling Co  
Address Carrollton, Ohio

Date 3-2-80  
Signed Glenn T. Speedy

\*If additional space is needed to complete well log, use next consecutive numbered form.