

# WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources  
Division of Water, 1939 Fountain Square Drive  
Columbus, Ohio 43224 Phone (614) 265-6739

819429

Permit Number 325101

COUNTY Muskingum

TOWNSHIP Harrison

SECTION/LOT No. 20  
(Circle One)

OWNER/BUILDER Jay E. Andrey Const.  
(Circle One or Both) First Last

PROPERTY ADDRESS 9410 Shady Lane Blue Rock, Ch  
(Address of well location) Number Street City

LOCATION OF PROPERTY @ .8 mi South on Shady Lane from Jct w/ S. River Rd. 43720  
(Address of well location) (Section/LOT No.)

## CONSTRUCTION DETAILS

|                                                                                                                                          |                      |                                |                                                            |                                                   |        |
|------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------------|------------------------------------------------------------|---------------------------------------------------|--------|
| <b>CASING</b> (Length below grade)                                                                                                       |                      | Borehole Diameter <u>5</u> in. |                                                            | GROUT <u>AquaGel (Bensrad)</u>                    |        |
| 1 Diameter <u>5 1/2</u> in.                                                                                                              | Length <u>121</u> ft | Wall Thickness <u>1/2</u> in.  | Material <u>AquaGel (Bensrad)</u>                          | Volume used <u>2 Bags</u>                         |        |
| 2 Diameter                                                                                                                               | Length               | Wall Thickness                 | Method of installation <u>Driven with casing</u>           | Depth placed from <u>4.5</u> ft to <u>Surface</u> |        |
| Type <input checked="" type="checkbox"/> Steel <input type="checkbox"/> Galv <input type="checkbox"/> PVC <input type="checkbox"/> Other |                      |                                | <b>GRAVEL PACK (Filter Pack)</b>                           |                                                   |        |
| Joints: <input checked="" type="checkbox"/> Threaded <input type="checkbox"/> Welded <input type="checkbox"/> Solvent                    |                      |                                | Material <u>Natural Gravel</u>                             | Volume used                                       |        |
| Liner Length                                                                                                                             | Type                 | Wall Thickness                 | Method of installation                                     | Depth placed from <u>48</u> ft to <u>52</u>       |        |
| <b>SCREEN</b>                                                                                                                            |                      |                                | Pitless Device <input checked="" type="checkbox"/> Adapter | Preassembled unit                                 |        |
| Type (wire wrapped, louvered, etc.)                                                                                                      |                      | Material                       | Use of Well <u>Domestic</u>                                |                                                   |        |
| Length                                                                                                                                   | ft                   | Diameter                       | Rotary <input checked="" type="checkbox"/> Cable           | Augered                                           | Driven |
| Set between                                                                                                                              | ft                   | and                            | Date of Completion <u>3-5-02</u>                           | Dug                                               | Other  |

## WELL LOG\*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED

Show color, texture, hardness, and formation  
sandstone, shale, limestone, gravel, clay, sand, etc

From To

Soil & silt 0 8'  
Gray Mud & silt 8' 20  
Sand w/ increasing 20 40  
Pea Gravel  
Heavier sand & 40 55  
Coarser Gravel

T.D.

Slotted from 46 to 51  
from top of casing after  
discounting screenage

## WELL TEST

Bailing 20' Pumping 8 Other 2 hrs  
Test rate 20' gpm Duration of test 2 hrs  
Drawdown 8  
Measured from: top of casing ☒ ground level Other 3-5-02  
Static Level (depth to water) 6 ft. Date: 3-5-02  
Quality (clear, cloudy, taste, odor) Cloudy

\*(Attach a copy of the pumping test record, per section 1521.05 ORC)

## PUMP


Type of pump Sub Capacity 12 gpm.  
Pump set at 35 ft  
Pump installed by Speedy Water Well Drilling

## WELL LOCATION

Location of well in State Plane coordinates, if available:

Zone x y  
Elevation of well ft/m. Datum plain: NAD27 NAD83  
Source of coordinates: GPS Survey Other

Sketch a map showing distance well lies from numbered state highways,  
street intersections, county roads, buildings or other notable landmarks

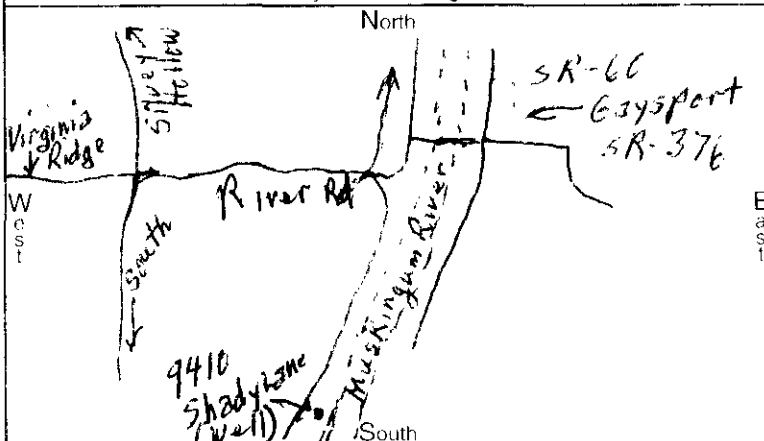

(If additional space is needed to complete well log, use next consecutively numbered form) I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Speedy Water Well Drilling  
Address 11490 Palmer Rd  
City, State, Zip Newark, Ohio 43056

Signed Glenn T. Speedy  
Date 3-6-02

ODH Registration Number 01365