

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

862052

WELL LOCATION

County Washington Township Independence

Owner/Builder MIKE MARININ
(Circle One or Both) First Last
Address of Well Location 4744 SUNSET DR
Number Street Name

City NEW MATAMOROS Zip Code +4 5767

Permit No. 1187 Section/Lot No.
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well Private

N ☐ X +/- ft. or m


S ☐ Y +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:
North

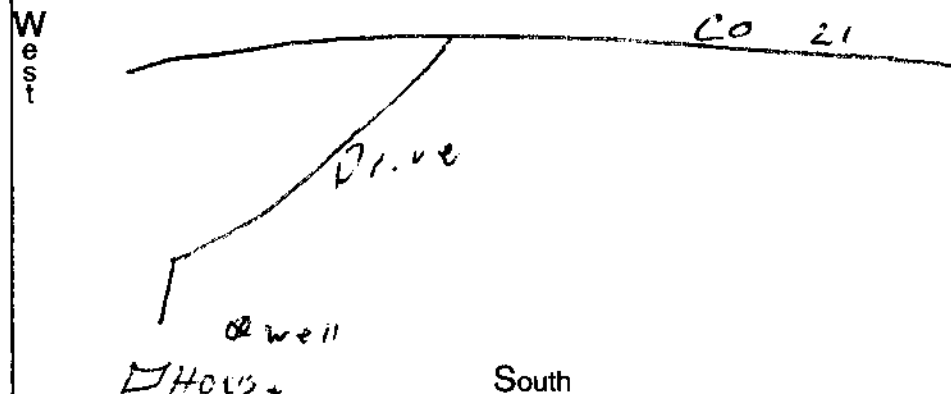

WELL TEST*

Pre-Pumping Static Level 10 ft. Date 11-14-97

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☒ Air ☐ Bailing ☐ Pumping* ☐ Other

Test Rate 50 gpm Duration of Test 1 hrs.

Feet of Drawdown 10 ft. Sustainable Yield gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality

PUMP/PITLESS*

Type of pump Capacity gpm

Pump set at ft. Pitless Type

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm D-L Drilling

Address 41803 THB17

City, State, Zip new matamoras oh 45767

Signed Captain Easley Date 11-15-97

ODH Registration Number 16940

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 8 inches Depth 28 ft.

Casing Diameter 6 1/8 in. Length 30 ft. Thickness 1/2 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 2 ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 4 1/2 Slot Size -35 Screen Length 55 ft.

Type mechanical-slotted Material PVC

Set Between 60 ft. and 55 ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used 500#

Method of Installation Gravity

Depth: Placed FROM 60 ft. TO 5 ft.

GROUT

Material Ben-seal Volume/Weight Used 250

Method of Installation Gravity

Depth: Placed FROM 28 ft. TO surface ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Top Soil	0	20
Gray shale Hard	20	28
Lime Hard	28	32
Gray shale	32	55
Gravel Bed	55	60

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy