

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

869090

WELL LOCATION

CONSTRUCTION DETAILS

County Stark Township Sugar Creek

Owner/Builder David Smith
(Circle One or Both) First Last

Address of Well Location 15012 MEADOR Rd
Number Street Name

City Nauvau Zip Code 43111

Permit No. 8356 Section/Lot No.
(Circle One or Both)

Location of Well in State Plane
coordinates, if available:

N ☐ X ft. or m


S ☐ Y ft. or m

Elevation of Well ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street
intersections, county roads, buildings or other notable landmarks. If latitude and
longitude are available please include here: Lat: Long:

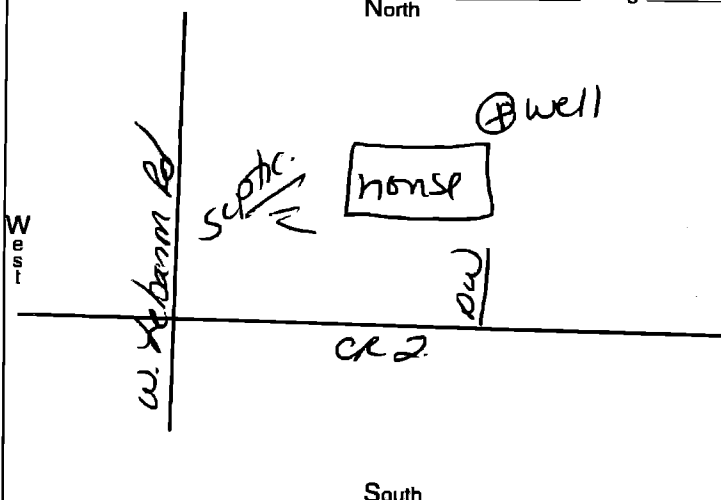

WELL TEST*

Pre-Pumping Static Level 20 ft. Date 4/27/99

Measured from: ☒ Top of Casing ☒ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 17 gpm Duration of Test 2 hrs.

Feet of Drawdown 30 ft. Sustainable Yield 17 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality Clear

PUMP/PITLESS

Type of pump Sub Capacity 10 gpm

Pump set at 44 ft. Pitless Type adapter

Pump installed by John A Dixon

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Dixon Low Drilling

Address 4040 IR 22

City, State, Zip Kennett OH

Signed John A Dixon Date 4/29/99

ODH Registration Number 2106

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 5 inches Depth 37 ft. Thickness 288 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length 21 ft. Thickness in.

Casing Height Above Ground ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐

2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐

2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material Benual Volume/Weight Used 100#

Method of Installation dry

Depth: Placed FROM 37 ft. TO 0 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Broken Brown Sandstone w/ clay	0	14
Brown Sandstone	14	20
Coal - Fire Clay	20	25
Gray Shale	25	32
Gray Sandstone	32	42
White Sandstone	42	50
Shale H ₂ O	50	60

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 4/27/99 Total Depth of Well 60 ft.