

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

869534

WELL LOCATION

County FULTON Township DOVER

Owner/Builder WALTER SMALLMAN
(Circle One or Both) First Last

Address of Well Location 13972 CORK
Number Street Name

City WAUSEON OH Zip Code +4 43567

Permit No. 98-38 Section/Lot No. 12
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well Residential

N ☐ X +/- ft. or m


S ☐ Y +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

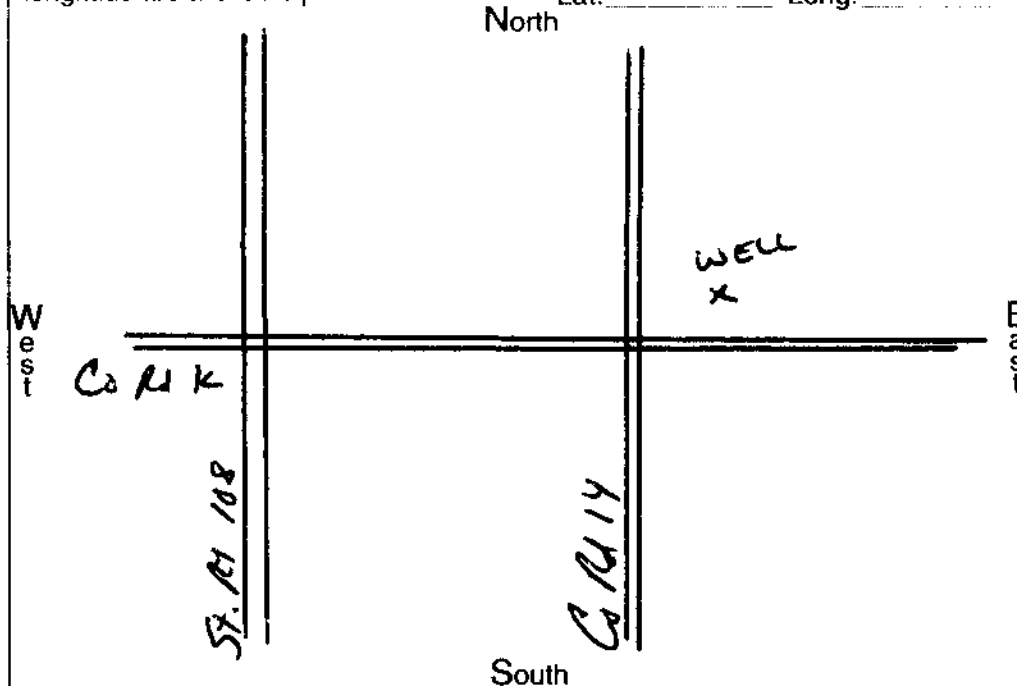

WELL TEST*

Pre-Pumping Static Level 20 ft. Date 5-98

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 15 gpm Duration of Test 2 hrs.

Feet of Drawdown 45 ft. Sustainable Yield 15 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality Clean -

PUMP/PITLESS

Type of pump Submersible Capacity 10 gpm

Pump set at 106 ft. Pitless Type ADAPTER

Pump installed by Wyce Well Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Wyce Well Drilling

Address Box 33

City, State, Zip Pettisville OH 43553

Signed J. T. Vy Date 5-98

ODH Registration Number 352

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☒ Borehole Diameter 5 inches Depth 180 ft.

Casing Diameter 5 in. Length 181 ft. Thickness .258 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 1 ft.

Type 1 ☒ Steel 1 ☒ Galv. 1 ☐ PVC 1 ☐ Other

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material POURCE Volume/Weight Used 2 BAGS

Method of Installation BEHIND DRIVE PIPE

Depth: Placed FROM 0 ft. TO 25 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED. Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.		From	To
SANDY CLAY		0'	8'
CLAY		8'	142'
HOMOGENEOUS		142'	178'
SAND & BROKEN SHALE & WATER		178'	180'

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 5-98 Total Depth of Well 180 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy