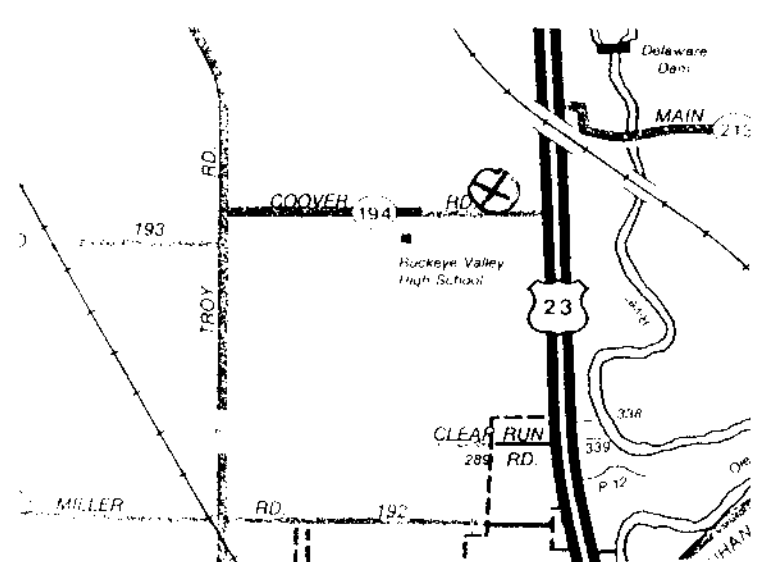


DNR 7802.96
TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

873753

WELL LOCATION		CONSTRUCTION DETAILS	
County	DELAWARE	X Rotary Cable Augered Driven Other	
Township	TROY	BOREHOLE/CASING (measured from ground surface)	
Owner/Builder (Circle One or Both)	XXXXX PAM BOYCE First Last	1 Borehole Diameter 7-7/8 inches Depth 70 ft. Casing Diameter 5 in. Length 70 ft. Thickness SDR 21 in.	
Address of Well Location	90 COOVER RD. Number Street Name	2 Borehole Diameter 4-1/2 inches Depth 72 ft. Casing Diameter in. Length ft. Thickness in.	
City	DELAWARE	Casing Height Above Ground 1 ft.	
Permit No.	1192-98	Type 1 Steel 1 Galv. 1 X PVC 1 Other 2 2 2 2 2	
Location of Well in State Plane coordinates, if available:	Use of Well 0.000 +/- ft. or m N X 0.000 +/- ft. or m S Y	Joints 1 Threaded 1 Welded 1 X Solvent 1 Other 2 2 2 2	
Elevation of Well	+/- ft. or m	SCREEN	
Datum Plain: [] NAD27 [] NAD83	Elevation Source	Diameter Slot Size Screen Length ft.	
Source of Coordinates: [] GPS [] Survey [] Other		Type Material ft. and ft.	
Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: North Long:		GRAVEL PACK (Filter Pack)	
		Material/Size Volume/Weight Used Method of Installation Depth: Placed FROM ft. TO ft.	
		GROUT	
		Material BENSEAL/EZ-MUD Volume/Weight Used 175 GAL. Method of Installation 1" TREMIE Depth: Placed FROM SURFACE ft. TO 70 ft.	
WELL TEST*		DRILLING LOG*	
Pre-Pumping Static Level 48 ft. Date 10/08/98		INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.	
Measured from: [] Top of Casing [X] Ground Level [] Other		Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.	
[X] Air [] Bailing [] Pumping* [] Other		From To	
Test Rate 20 gpm Duration of Test 1 hrs.		BROWN CLAY 0 20	
Feet of Drawdown 27 ft. Sustainable Yield 20 gpm		GRAY CLAY 20 38	
*(Attach a copy of the pumping test record, per section 1521.05, ORC)		SAND AND GRAVEL 38 46	
Is Copy Attached? [] Yes [X] No Flowing Well? [] Yes [X] No		SAND, GRAVEL, AND BOULDERS 46 62	
Quality CLEAR		BROWN LIMESTONE 62 66	
		LIGHT GRAY LIMESTONE 66 108	
		LIGHT BROWN TO BROWN LIMESTONE (WATER) 108 142	
PUMP/PITLESS			
Type of pump SUBMERSIBLE Capacity 10 gpm			
Pump set at 105 ft. Pitless Type DICKENS			
Pump installed by SPROWLS DRILLING COMPANY			
I hereby certify the information given is accurate and correct to the best of my knowledge.		Note: Well log is approximate, based on driller's general description and approximate depths.	
Drilling Firm SPROWLS DRILLING COMPANY			
Address 565 WEST CHERRY ST.; PO BOX 107			
City, State, Zip SUNBURY, OH 43074			
Signed Dale F. [Signature] Date 10/20/98			
ODH Registration Number 1731			
		*(If more space is needed to complete drilling log, use next consecutively numbered form.)	
		Date of Well Completion 10/09/98 Total Depth of Well 142 ft.	

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy