

WELL LOG AND DRILLING REPORT

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD


Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

877262

WELL LOCATION

County CLARK Township BETHEL
Owner/Builder JOHN COMPTON / IRELAND HOMES
First Last
Address of Well Location 774 SHAWNEE PARK
Number Street Name
City SPRINGFIELD Zip Code +4
Permit No 6120 Section/Lot No.
(Circle One or Both) (Circle One or Both)
Location of Well in State Plane or coordinates, if available: Use of Well SINGLE FAM. RES.
N X . ft. or m
S Y . ft. or m
Elevation of Well . ft. or m
Datum Plain NAD27 | NAD83 Elevation Source
Source of Coordinates: GPS | Survey | Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat Long:

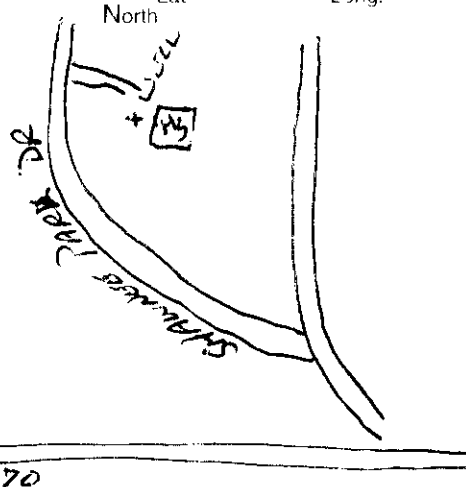

WELL TEST*

P re-Pumping Static Level 48 ft. Date 9 Aug 00
Measured from Top of Casing | ☒ Ground Level | Other
Air | ☒ Bailing | Pumping | Other
Test Rate 15 gpm Duration of Test 1 hrs.
Feet of Drawdown 20 ft Sustainable Yield gpm
(* Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? | Yes | No Flowing Well? Yes ☒ No
Quality GOOD - CLEAR

PUMP/PITLESS

Type of pump Subm Capacity 10 gpm
Pump set at 125 ft. Pitless Type Slide
Pump installed by STOLTZ WELL DRILL
I hereby certify the information given is accurate and correct to the best of my knowledge
Drilling Firm STOLTZ WELL DRILLING
Address 4004 W. STATE ST.
City, State, Zip TROY, OHIO 45373

Signed Craig R. Stoltz Date 9 Aug 00
ODH Registration Number 1864

CONSTRUCTION DETAILS

Rotary ☒ Cable ☒ Augered ☐ Driven ☐ Other ☐
BOREHOLE/CASING (measured from ground surface)
1 Borehole Diameter 5 1/2 inches Depth 150 ft.
Casing Diameter 5 5/8 in. Length 30 ft. Thickness .188 in.
2 Borehole Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground 18 IN ft.
Type 1 ☒ Steel 1 ☒ Galv. 1 ☐ PVC 1 ☐ Other
2 ☐ Threaded 2 ☒ Welded 2 ☐ Solvent 2 ☐ Other
SCREEN
Diameter Slot Size Screen Length ft.
Type Material
Set Between ft. and ft.
GRAVEL PACK (Filter Pack)
Material/Size Volume/Weight Used
Method of Installation
Depth: Placed FROM ft. TO ft.
GROUT
Material BENTONITE Volume/Weight Used 15 CU FT
Method of Installation DRY POUR
Depth: Placed FROM 30 ft. TO SURFACE ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
<u>CLAY</u>	<u>0</u>	<u>28</u>
<u>WHITE LIMESTONE</u>	<u>28</u>	<u>117</u>
<u>BLUE SHALE</u>	<u>117</u>	<u>150</u>