

TYPE OR USE PEN  
SELF TRANSCRIBING  
PRESS HARD

# WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources  
Division of Water, 1939 Fountain Square Drive  
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

877264

## WELL LOCATION

County CLARK Township BOTHLET

Owner/Builder JAMES W. BEANTON  
(Circle One or Both) First Last

Address of Well Location 1131 GARY LN  
Number Street Name

City NEW CARLISLE Zip Code +4 45344

Permit No. 6165 Section/Lot No.   
(Circle One or Both)

Location of Well in State Plane  
Coordinates, if available: Use of Well

N ☒ X ☐ ft. or m


S ☐ Y ☐ ft. or m

Elevation of Well ☐ ft. or m

Datum Plain NAD27 | NAD83 Elevation Source

Source of Coordinates: | ☒ GPS Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here. Lat: North Long:

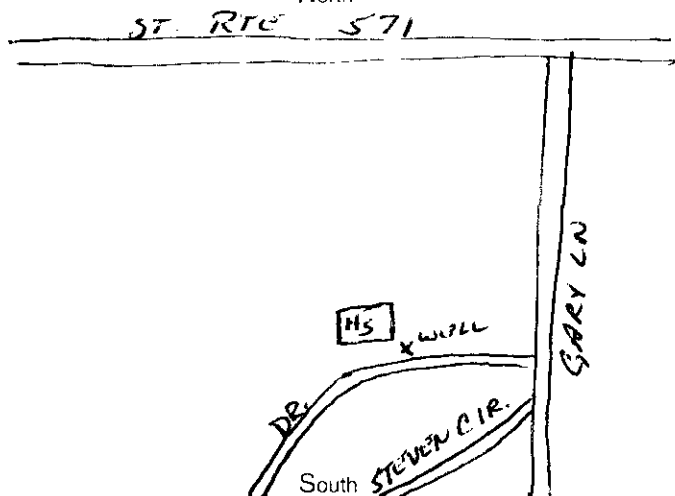

## WELL TEST

Pumping Static Level 20 ft Date 13 JULY 00

Measured from: ☒ Top of Casing ☒ Ground Level ☐ Other

Air ☒ Bailing ☐ Pumping ☐ Other

Test Rate 15 gpm Duration of Test 1 hrs.

Feet of Drawdown 2 ft Sustainable Yield  gpm

(Attach a copy of the pumping test record per section 1521.05 ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality GOOD - CLEAR

## PUMP/PITLESS

Type of pump 30T Capacity 5 gpm

Pump set at 30 ft. Pitless Type HARVARD SLIDE

Pump installed by STOLTZ WELL DRILL

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm STOLTZ WELL DRILLING

Address 4004 W. ST. RT. 41

City, State, Zip TROY OHIO 45373

Signed Clay R. Stoltz Date 27 JULY 00

GDH Registration Number 1864

## CONSTRUCTION DETAILS

Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other ☐

**BOREHOLE/CASING** (measured from ground surface)

1 Borehole Diameter 5 1/2 inches Depth 142 ft.

Casing Diameter 5 5/8 in. Length 143 ft. Thickness .188 in.

2 Borehole Diameter  inches Depth  ft.

Casing Diameter  in. Length  ft. Thickness  in.

Casing Height Above Ground  ft.

Type 1 ☒ Steel 1 ☒ Galv 1 ☐ PVC 1 ☐ Other

2 ☐ Steel 2 ☐ Galv 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

**SCREEN**

Diameter 4 in Slot Size 20 Screen Length 3 ft.

Type SLOTTED Material PVC

Set Between 142 ft. and 139 ft.

**GRAVEL PACK** (Filter Pack)

Material/Size  Volume/Weight Used

Method of Installation

Depth: Placed FROM  ft. TO SURFACE ft.

**GROUT**

Material BENTONITE Volume/Weight Used 2 CU FT

Method of Installation DRY POUR

Depth: Placed FROM 28 ft TO SURFACE ft.

## DRILLING LOG\*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

|             | From | To  |
|-------------|------|-----|
| CLAY        | 0    | 28  |
| SAND        | 28   | 42  |
| CLAY        | 42   | 98  |
| SAND        | 98   | 139 |
| SAND & GRVL | 139  | 142 |