

DNR 7802.96
TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT


878722

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

WELL LOCATION

County MONROE Township FRANKLIN
Owner/Builder SONJA HAWKINS
(Circle One or Both) First Last
Address of Well Location 40832 CREIGHTON RIDGE RD.
Number Street Name
City LEWISVILLE Zip Code +4 3754
Permit No. 33 Section/Plot No. 6
(Circle One or Both)
Location of Well in State Plane coordinates, if available:
N ☐ X ☒ S ☐ Y ☐ Use of Well SINGLE FAMILY
Elevation of Well 34 ft. or m. +/- ft. or m. +/- ft. or m. +/-
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source Survey
Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: _____ Long: _____
North

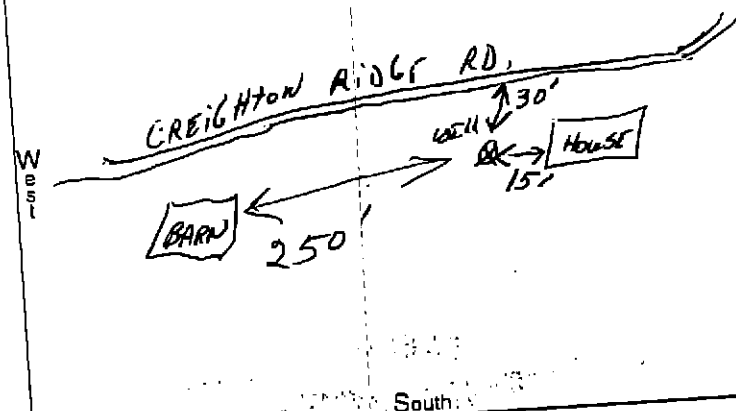

WELL TEST

Pre-Pumping Static Level 34 ft. Date 10/27/00
Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other
☐ Air ☒ Bailing ☐ Pumping ☐ Other
Test Rate 34 gpm Duration of Test 1/2 hrs.
Feet of Drawdown 36 ft. Sustainable Yield 34 gpm
*(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No
Quality cloudy no taste

PUMP/PITLESS

Type of pump by owner Capacity _____ gpm
Pump set at _____ ft. Pitless Type _____
Pump installed by _____

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm WILHELM'S DRILLING SERVICE
Address 43872 TH 256
City, State, Zip LEWISVILLE OHIO 43754

Signed John Wilhelm Date 10/28/00
ODH Registration Number 1562

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
1 ☐ Borehole Diameter 12 inches Depth 70 ft.
Casing Diameter 8 in. Length 71 ft. Thickness 1/2 in.
2 ☐ Borehole Diameter _____ inches Depth _____ ft.
Casing Diameter _____ in. Length _____ ft. Thickness _____ in.
Casing Height Above Ground 1' 0" ft.
Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐ Other
2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other
Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐ Other
2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 8" IT Slot Size 3/8 Hole Screen Length 45 ft.
Type PVC Material PVC
Set Between 25 ft. and 70 ft.

GRAVEL PACK (Filler Pack)

Material/Size #8 PER Volume/Weight Used 2000 lb.
Method of Installation POURED
Depth: Placed FROM 25 ft. TO 70 ft.

GROUT

Material Cement Grout Volume/Weight Used 1040 lb.
Method of Installation POURED
Depth: Placed FROM 3 ft. TO 25 ft.

DRILLING LOG

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.		From		To
Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.				
LIGHT BROWN CLAY (SOFT)		0	2	
RED CLAY (VERY SOFT)		2	10	
LIGHT BROWN SANDSTONE (HARD)		10	18	
GRAY SHALE (SOFT)		18	22	
RED SHALE (SOFT)		22	26	
GRAY SHALE (SOFT)		26	46	
RED SHALE (SOFT)		46	53	
GRAY SHALE (SOFT)		53	55	
GRAY SANDSTONE (HARD)		55	57	
GRAY SHALE (SOFT)		57	65	
GRAY SAND (SOFT)		65	70	

WATER 35 ft

(If more space is needed to complete drilling log, use next consecutively numbered form.)
Date of Well Completion 10/28/00 Total Depth of Well 70 ft.