

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

878723

WELL LOCATION

County MONROE Township FRANKLIN

Owner/Builder STEVE VOLLMAR
(Circle One or Both) First Last

Address of Well Location 42202 TH 660
Number Street Name

City LEWISVILLE Zip Code +4 3754

Permit No. 29 Section/Lot No. 14
(Circle One or Both)

Location of Well in State Plane coordinates, if available:

N ☐ X ☐ +/- ft. or m


S ☐ Y ☐ +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☒ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

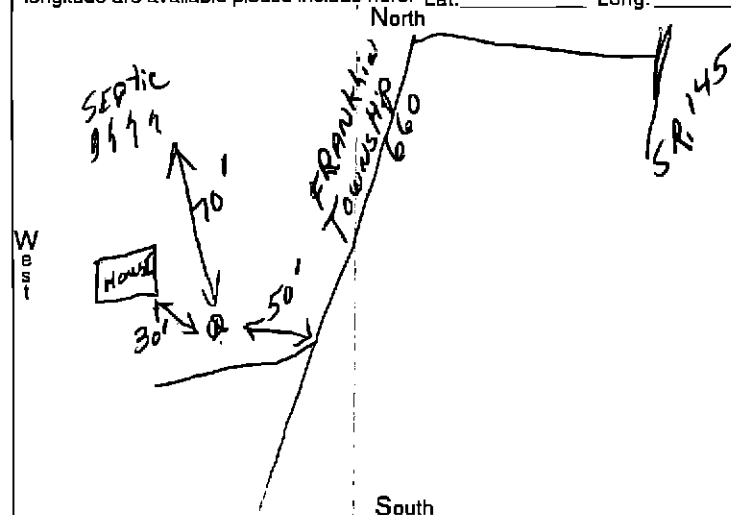

WELL TEST*

Pre-Pumping Static Level 39 ft. Date 10/7/00

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping ☐ Other

Test Rate 100 GAL PER DAY Duration of Test 24 hrs.

Feet of Drawdown 60 ft. Sustainable Yield 4 GPM gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality CLEAR NO FASTE

PUMP/PITLESS

Type of pump by owner Capacity gpm

Pump set at ft. Pitless Type

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm WILHELM'S DRILLING SERVICE

Address 43872 TH 256

City, State, Zip LEWISVILLE, OHIO 43754

Signed John W. Wilhelm Date 10/12/00

ODH Registration Number 1562

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 13 inches Depth 99' ft.
Casing Diameter 8 in. Length 100 ft. Thickness 1/2" in.

2 ☐ Borehole Diameter _____ inches Depth _____ ft.
Casing Diameter _____ in. Length _____ ft. Thickness _____ in.

Casing Height Above Ground 1' ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐
2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐
2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 8" Slot Size 3/8" HOLE Screen Length 70' ft.

Type SDR 21 Material PVC

Set Between 29' ft. and 99' ft.

GRAVEL PACK (Filter Pack)

Material/Size #8 PEA GRAVEL Volume/Weight Used 3000 lbs

Method of Installation POURED

Depth: Placed FROM 26' ft. TO 99' ft.

GROUT

Material CEMENT Volume/Weight Used 1120 lbs

Method of Installation POURED

Depth: Placed FROM 3' ft. TO 25' ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
YELLOW CLAY (SOFT)	0	4
RED CLAY (SOFT)	4	7
RED SHALE (SOFT)	7	19
BROWN SHALE (SOFT)	19	21
LIGHT BROWN SANDSTONE (MED)	21	22
RED SHALE (SOFT)	22	35
GRAY SHALE (SOFT)	35	48
RED SHALE (VERY SOFT)	48	52
GRAY SHALE & SANDSTONE (MED)	52	55
GRAY SHALE (SOFT)	55	91
RED SHALE (SOFT)	91	99

WATER ~ 41'

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 10/7/00 Total Depth of Well 99 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO: ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy