

WELL LOG AND DRILLING REPORT

TYPE OR USE PEN
SILENT TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

879691

WELL LOCATION

CONSTRUCTION DETAILS

County Clermont Township Willoughby

Owner/Builder Harry Bullen
(Circle One or Both) First Last

Address of Well Location 3749 Greenbush Rd
Number Street Name

City Willoughby OH Zip Code +4 45176
Permit No. NO permit Section/Lot No. NORTH
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well Water Livestock


N ☒ X +/- ft. or m
S ☐ Y +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☒ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

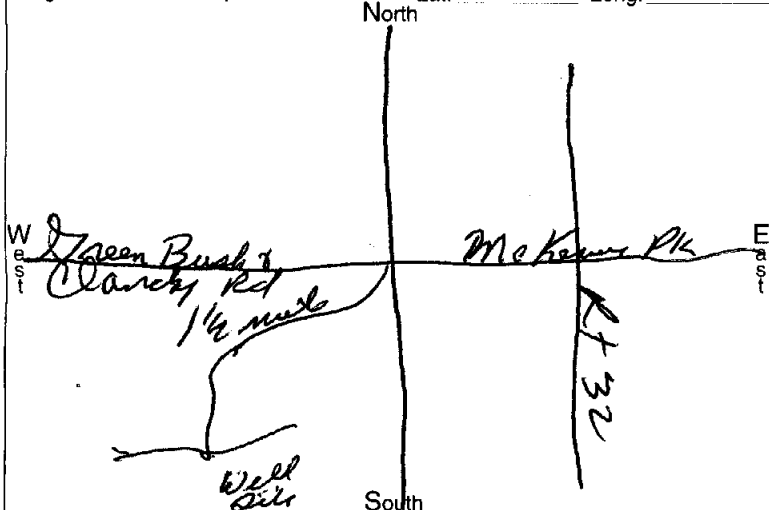

WELL TEST*

Pre-Pumping Static Level 15 ft. Date

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 5 gpm Duration of Test 1 hrs.

Feet of Drawdown ft. Sustainable Yield 5 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality

PUMP/PITLESS

Type of pump Unknown Capacity gpm

Pump set at ft. Pitless Type

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Dick Hapley & Son

Address 2213 SR 133 N

City, State, Zip Blanchester OH 45107

Signed Dick Hapley Date 10-2-02

ODH Registration Number 1532

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 5 7/8 inches Depth 133 ft.

Casing Diameter 6 in. Length 46-1 ft. Thickness in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 16" ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐

2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐

2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material Benseal Volume/Weight Used 45 LBS

Method of Installation Put around casing

Depth: Placed FROM 30 ft. TO ground level ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

From To

lite brown clay hard 0 20

lite gray clay & gravel 20

mixed hard 28

green clay hard 28 31

lite gray shale rock 31 46

hard limestone & 46

soft shale rock

dark gray 133

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy