

WELL LOG AND DRILLING REPORTTYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

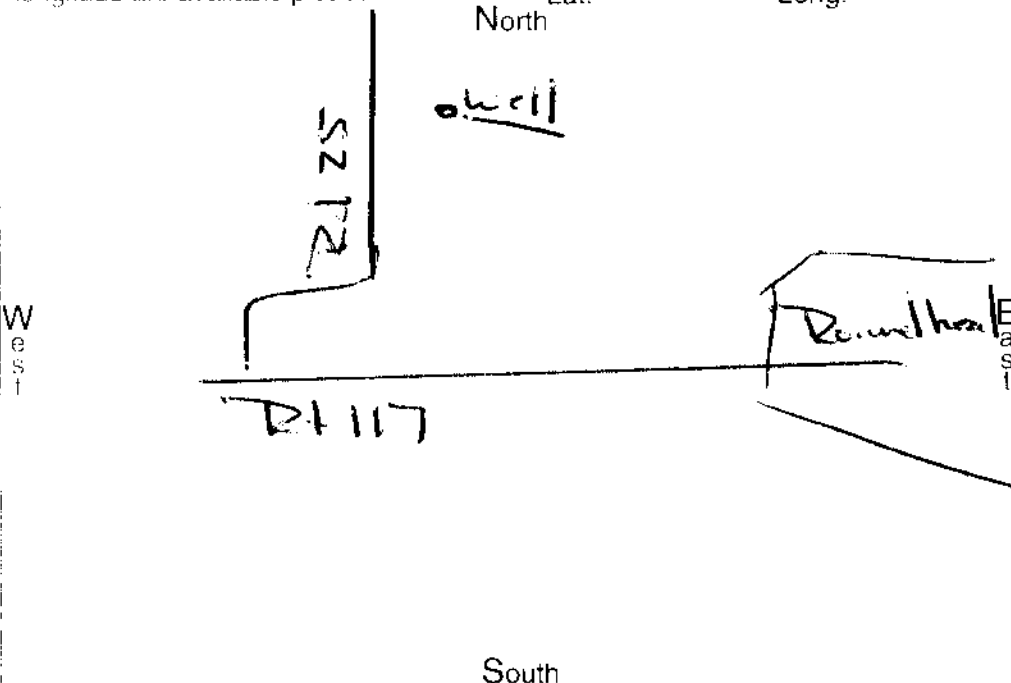
881998

WELL LOCATIONCounty Hardin Township ReynoldsOwner/Builder Eddie Nichols
(Circle One or Both) First LastAddress of Well Location 13834 Top Rd 25
Number Street NameCity Harrod Zip Code +4 5850Permit No. 64 Section/Lot No. 26
(Circle One or Both)Location of Well in State Plane
coordinates, if available:Use of Well DomesticN X +/- ft. or mS Y +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: NAD27 NAD83 Elevation SourceSource of Coordinates: GPS Survey Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

**WELL TEST***Pre-Pumping Static Level 50 ft. Date 8/27/98Measured from Top of Casing Ground Level OtherAir Bailing Pumping* OtherTest Rate 6 gpm Duration of Test 1 hrs.Feet of Drawdown 110 ft. Sustainable Yield 6 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? Yes No Flowing Well? Yes No

Quality

PUMP/PITLESS

Type of pump Capacity gpm

Pump set at ft. Pitless Type

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Seven Well DrillingAddress Dolphon Ohio

City, State, Zip

Signed Dan SumDate 8/27/98ODH Registration Number 116**CONSTRUCTION DETAILS**☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other**BOREHOLE/CASING** (measured from ground surface)1 Borehole Diameter 9 inches Depth 133 ft.Casing Diameter 6 in. Length 134 ft. Thickness SDR21 in.

2 Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground ft.

Type 1 Steel 1 Galv. 1 PVC 1 OtherJoints 1 Threaded 1 Welded 1 Solvent 1 Other**SCREEN**

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUTMaterial Bentonite Pump Volume/Weight Used 300 lbs

Method of Installation

Depth: Placed FROM 133 ft. TO 0 ft.**DRILLING LOG***

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.Clay
Limestone

From	To
<u>0</u>	<u>130</u>
<u>130</u>	<u>182</u>

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy