

TYPE OR USE PEN  
SELF TRANSCRIBING  
PRESS HARD

# WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources  
Division of Water, 1939 Fountain Square Drive  
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

882517

## WELL LOCATION

## CONSTRUCTION DETAILS

County MUSKINGHAM Township HOPEWELL

Owner/Builder TIMOTHY M. BISHOP  
(Circle One or Both) First Last

Address of Well Location 8510 MACEDONIA R.D.  
Number Street Name

City HOPEWELL Zip Code +4 43746

Permit No. 385787 Section/Lot No. 8  
(Circle One or Both)

Location of Well in State Plane coordinates, if available:


N ☒ X ☐ Y ☐ 961 ft. or m

Elevation of Well 961 ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat 39°59' 969 Long 82°08' 936  
RT North 146

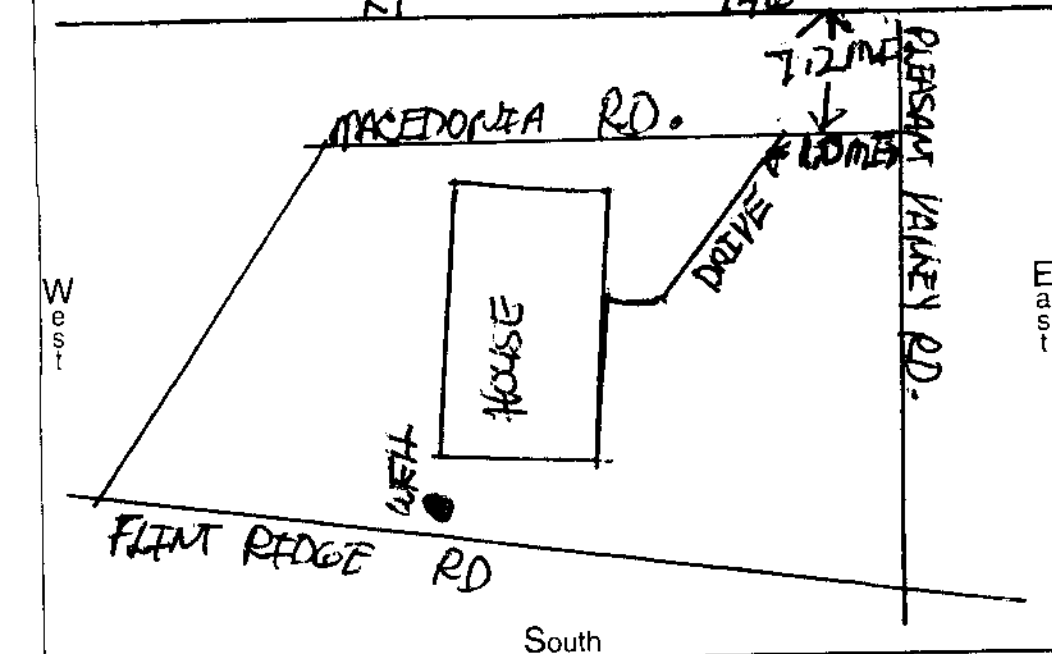

## WELL TEST\*

Pre-Pumping Static Level 90 ft. Date 10-27-08

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☐ Bailing ☒ Pumping\* ☐ Other

Test Rate 5 gpm Duration of Test 4 hrs.

Feet of Drawdown 0 ft. Sustainable Yield 5 gpm

\*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☐ No

Quality CLEAR

## PUMP/PITLESS

Type of pump SUBMERSIBLE Capacity 8 gpm

Pump set at 122 ft. Pitless Type PUMP THROUGH

Pump installed by JIM MORAN - DREW WOLFORD

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm JAMES R. MORAN DRILLING INC.

Address 604 SO. STATE ST. P.O. BOX 296

City, State, Zip FRAZEEBURG, OHIO 43822

Signed James R. Moran Date 11-01-08

ODH Registration Number 2061

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

☒ Borehole Diameter 8 inches Depth 80 ft.

Casing Diameter 6 3/4 in. Length 130 ft. Thickness 0.327 in.

☒ Borehole Diameter 6 3/4 inches Depth 130 ft.

Casing Diameter 5 in. Length 130 ft. Thickness 0.327 in.

Casing Height Above Ground 1.5 ft.

Type ☐ Steel ☐ Galv. ☒ PVC ☐ Other

Joints ☐ Threaded ☐ Welded ☒ Solvent ☐ Other

SCREEN

Diameter 8 Slot Size 1/8 Screen Length 130 ft.

Type 1 Material 1

Set Between 1 ft. and 1 ft.

GRAVEL PACK (Filter Pack)

Material/Size 20/40 Volume/Weight Used 250 #

Method of Installation SURRY THRU 1" TRIMME

Depth: Placed FROM 80 ft. TO 0 ft.

GROUT

Material BENSEN EZ-MUD Volume/Weight Used 250 #

Method of Installation SURRY THRU 1" TRIMME

Depth: Placed FROM 80 ft. TO 0 ft.

DRILLING LOG\*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

From To

0 3

3 6

6 15

15 25

25 28

28 35

35 40

40 80

80 90

90 100

100 110

110 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

130 130

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.  
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971  
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy