

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

883112

WELL LOCATION

County PERRY Township HOPEWELL

Owner/Builder BOB HENERY
(Circle One or Both) First Last

Address of Well Location 4412 HIGHPOINT RD
Number Street Name

City GLENFORD Zip Code +4

Permit No. 037 Section/Plot No.
(Circle One or Both)

Location of Well in State Plane
coordinates, if available:

N ☐ X ☐ +/- ft. or m

S ☐ Y ☐ +/- ft. or m

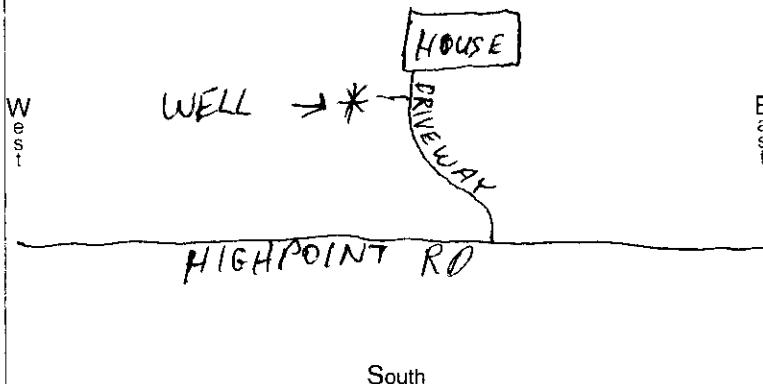
Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Use of Well SINGLE-FAMILY DWELLING

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: _____ Long: _____
North

**WELL TEST***

Pre-Pumping Static Level 30 ft. Date 6-2-00

Measured from: ☐ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 10-12 gpm Duration of Test 1 1/2 hrs.

Feet of Drawdown 170 ft. Sustainable Yield 10-12 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ No

Quality CLEAR, NO TASTE, NO ODER

PUMP/PITLESS

Type of pump SUBMERSIBLE (MYERS) Capacity 12 gpm

Pump set at 102 ft. Pitless Type MERRILL

Pump installed by GERALD HELSER & SONS

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm GERALD HELSER & SONS

Address 7312 TWP RD 87 NW

City, State, Zip THORNVILLE, OH 43076

Signed James T. Helser

Date 6/20/00

ODH Registration Number 1679

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1' Borehole Diameter 5 inches Depth 110 ft.

Casing Diameter 5 in. Length 38 ft. Thickness .258 in.

2' Borehole Diameter _____ inches Depth _____ ft.

Casing Diameter _____ in. Length _____ ft. Thickness _____ in.

Casing Height Above Ground 2 ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 4" Slot Size 1/8 Screen Length 100 ft.

Type LINER Material PVC CASING

Set Between 10' ft. and 110' ft.

GRAVEL PACK (Filter Pack)

Material/Size _____ Volume/Weight Used _____

Method of Installation _____

Depth: Placed FROM _____ ft. TO _____ ft.

GROUT

Material HOLE PLUG Volume/Weight Used 100 LBS

Method of Installation DRIVEN

Depth: Placed FROM 18 ft. TO SURFACE ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
BROWN SANDY CLAY	0	4
GRAY SANDY CLAY	4	14
SOFT BROWN SANDSTONE	14	31
GRAY SHALE	31	110