

WELL LOG AND DRILLING REPORT

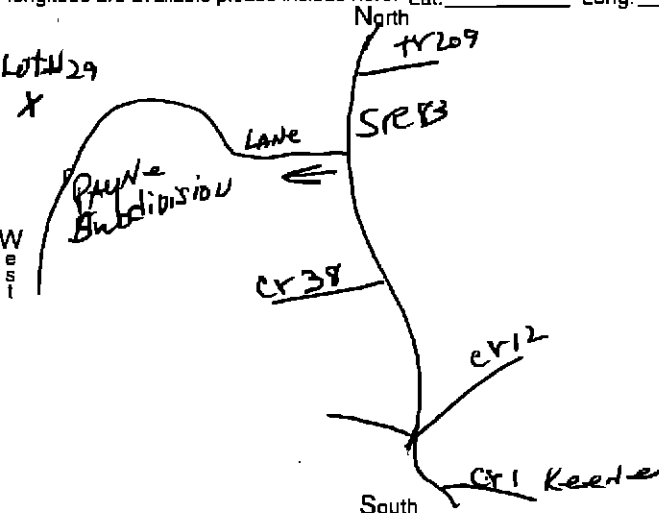
Ohio Department of Natural Resources

Division of Water, 1939 Fountain Square Drive

Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

884245

WELL LOCATION

County Coshocton Township MillcreekOwner/Builder NANCIE S Lynch
First LastAddress of Well Location 29285 SR R3 RAYE
Number Street NameCity Coshocton OH Zip Code +4 43812Permit No. 2000-19 Section/Lot No. 30.3030
(Circle One or Both)Location of Well in State Plane
coordinates, if available:N ☐ X +/- ft. or m.S ☐ Y +/- ft. or m.Elevation of Well +/- ft. or m.Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source Source of Coordinates: ☐ GPS ☐ Survey ☐ Other Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long: 

WELL TEST*

Pre-Pumping Static Level ft. Date Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other ☐ Air ☒ Bailing ☐ Pumping* ☐ Other Test Rate 1 gpm Duration of Test 2 hrs.Feet of Drawdown Dry ft. Sustainable Yield 1 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

s Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ NoQuality

PUMP/PITLESS

Type of pump Sub Capacity 5 gpmPump set at 215 ft. Pitless Type DiaphragmPump installed by N.L. Group Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm N.L. Group DrillingAddress 29616 Rt 209City, State, Zip Coshocton OH 43812Signed Red L Group Date 5/26/00

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 7 inches Depth 68 ft.Casing Diameter 5 in. Length 68 ft. Thickness in.2 ☐ Borehole Diameter inches Depth ft.Casing Diameter in. Length ft. Thickness in.Casing Height Above Ground 34 ft.Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other 2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other 2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.Type Material Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used Method of Installation Depth: Placed FROM ft. TO ft.

GROUT

Material Bentonite Volume/Weight Used 1250Method of Installation PourDepth: Placed FROM ground ft. TO 68 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Loam	0	2
Yellow Shale	2	35
Gray Shale	35	86
Lime	86	89
Shale	89	100
Sandstone	100	105
Shale	105	120
Lime	120	123
Shale	123	155
Sandstone	155	168
Shale	168	220
Water 168 ft		
Dr. Shale		

*(If more space is needed to complete drilling log, use next consecutively numbered form.)