

WELL LOG AND DRILLING REPORT

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

884250


WELL LOCATION

County Coshocton Township LafayetteOwner/Builder Doug Taylor
(Circle One or Both) First LastAddress of Well Location 52470 TR 166
Number Street NameCity West Lafayette Zip Code +4 43845Permit No. 2000-135 Section/Lot No. 3
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well

N X + + ft. or mS Y + + ft. or mElevation of Well + + ft. or mDatum Plain: ☐ NAD27 ☐ NAD83 Elevation SourceSource of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

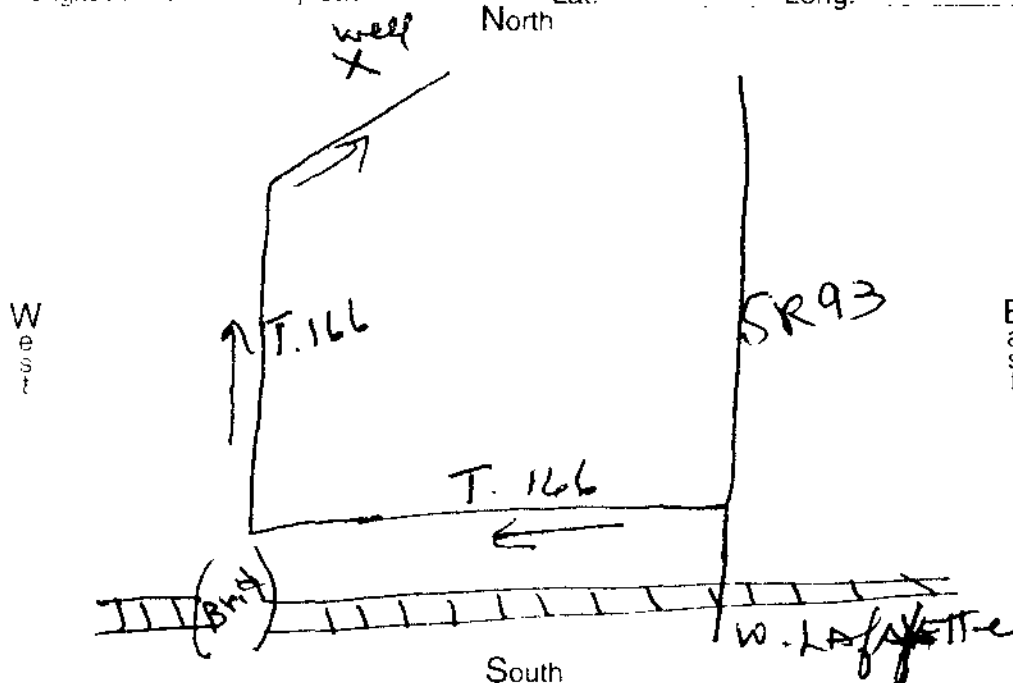

WELL TEST*

Pre-Pumping Static Level 45-12 ft. Date 9-00Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other☐ Air ☒ Bailing ☐ Pumping ☐ OtherTest Rate 10-12 gpm Duration of Test 2 hrs.Feet of Drawdown 2 ft. Sustainable Yield 10-12 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

s Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ NoQuality Clear

PUMP/PITLESS

Type of pump Sub Capacity 8-10 gpmPump set at 75 ft. Pitless Type DickensPump installed by N L Group Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm N L Group DrillingAddress 29616 TR 209City, State, Zip Coshocton OH 43812Signed Ned L Group Date 10-9-00ODH Registration Number 1293

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 6 inches Depth 90 ft.Casing Diameter 5 1/2 in. Length 90.5 ft. Thickness in.2 ☐ Borehole Diameter inches Depth ft.Casing Diameter in. Length ft. Thickness in.Casing Height Above Ground ft.Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ OtherJoints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 5 1/2 Slot Size Screen Length 3-2 ft.Type Point Material Set Between 90 ft. and 78.5 ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used Method of Installation Depth: Placed FROM ft. TO ft.

GROUT

Material Benson's quick Volume/Weight Used 450 lbMethod of Installation Hand CasedDepth: Placed FROM Spring ft. TO 30 ft.


DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

Loam
Sand & Gravel
Water 82-86

Point

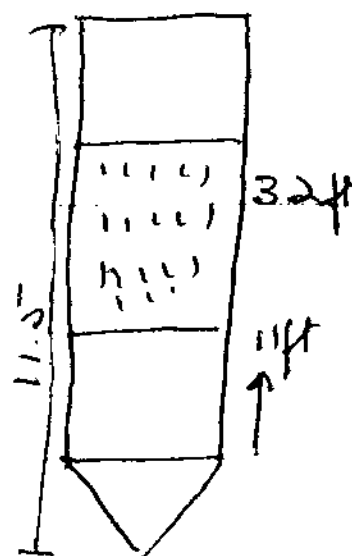

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 9-00 Total Depth of Well 90 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy