

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

886106

WELL LOCATION

County Wayne Township Eaton Union

Owner/Builder Larry Evans
(Circle One or Both) First Last

Address of Well Location 4614 Westwood Drive
Number Street Name

City Apple Creek, O. Zip Code +4 44606

Permit No. 28
Section/Lot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well Residential

N ☒ X +/- ft. or m


S ☐ Y +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

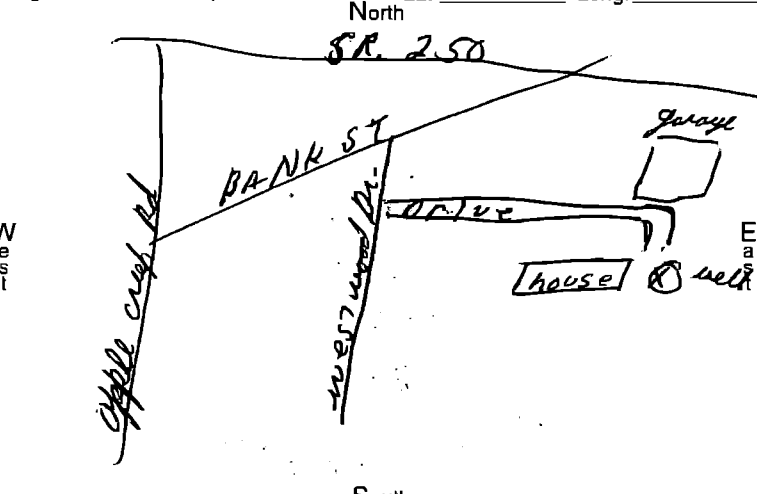

WELL TEST*

Pre-Pumping Static Level 2 ft. Date 3-30-99

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☐ Bailing ☒ Pumping* ☐ Other

Test Rate 50 gpm Duration of Test 3 hrs.

Feet of Drawdown 1 ft. Sustainable Yield gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☒ Yes ☐ No

Quality Clear

PUMP/PITLESS

Type of pump Redback submersible Capacity 10 gpm

Pump set at 40 ft. Pitless Type adapter

Pump installed by Shedler Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Shedler Drilling

Address 6719 E. Moreland Rd.

City, State, Zip Fred. Aug. - O. 44627

Signed Emanuel J. Shetler Date 3-30-99

ODH Registration Number 02531

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 5 inches Depth 163 ft.

Casing Diameter 5 1/2 in. Length 137 1/2 ft. Thickness .275 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 18 ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filler Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material BonSett Volume/Weight Used 100 lbs.

Method of Installation

Depth: Placed FROM 10 ft. ft. TO Surface ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Br. Clay Sand & Gravel	0	25
Sand & gravel mix	25	91
Brown clay sand & gravel	91	134
lite Brown sand stone	132	145
gray sand stone	145	163
water encountered	30	60
	130	145

Iron Negative

Sulfur 11

Hardness good

ph. 7.4

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 3-30-99 Total Depth of Well 163 ft.