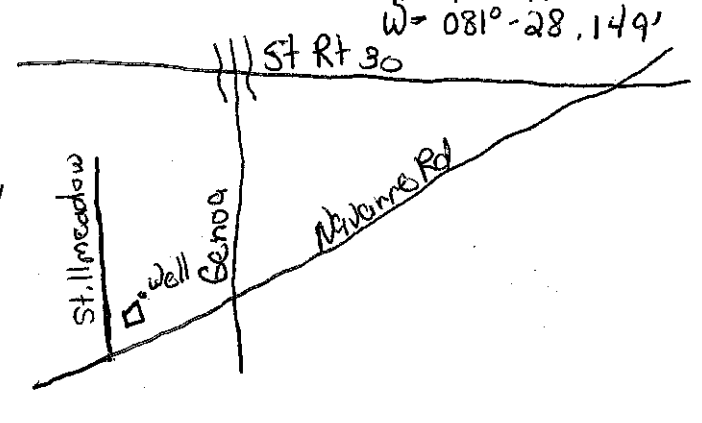


TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

886383

WELL LOCATION		CONSTRUCTION DETAILS																																		
County <u>Stark</u> Township <u>Perry</u> Owner/Builder <u>Homes by Ashley</u> Address of Well Location <u>6029 Navarre Rd</u> City <u>Canton OH</u> Zip Code <u>+4706</u> Permit No. <u>9099</u> Section/Lot No. <u></u> Location of Well in State Plane coordinates, if available: <u></u> Use of Well <u>domestic</u> N ☐ X <u></u> +/- <u></u> ft. or m S ☐ Y <u></u> +/- <u></u> ft. or m Elevation of Well <u></u> +/- <u></u> ft. or m Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source <u></u> Source of Coordinates: ☐ GPS ☐ Survey ☐ Other <u></u>		☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other <u></u> BOREHOLE/CASING (measured from ground surface) 1 ☐ Borehole Diameter <u>7 7/8</u> inches Depth <u>50</u> ft. Casing Diameter <u>5</u> in. Length <u>32</u> ft. Thickness <u>SDR-21</u> in. 2 ☐ Borehole Diameter <u></u> inches Depth <u></u> ft. Casing Diameter <u></u> in. Length <u></u> ft. Thickness <u></u> in. Casing Height Above Ground <u>1</u> ft. Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐ Other <u></u> 2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other <u></u> Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐ Other <u></u> 2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other <u></u> SCREEN Diameter <u></u> Slot Size <u></u> Screen Length <u></u> ft. Type <u>N/A</u> Material <u></u> Set Between <u></u> ft. and <u></u> ft. GRAVEL PACK (Filter Pack) Material/Size <u>N/A</u> Volume/Weight Used <u></u> Method of Installation <u>N/A</u> Depth: Placed FROM <u></u> ft. TO <u></u> ft. GROUT Material <u>Bentonite</u> Volume/Weight Used <u>4-50 lbs 200 lb</u> Method of Installation <u>pour-tremie</u> Depth: Placed FROM <u>50</u> ft. TO <u>0</u> ft.																																		
Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: <u>N 40° 45' 408'</u> Long: <u>W 081° 28' 149'</u> 		DRILLING LOG* INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED. Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc. <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>From</th> <th>To</th> </tr> </thead> <tbody> <tr><td>Brown Clay & Gravel</td><td>0'</td><td>15'</td></tr> <tr><td>Brown Clay</td><td>15'</td><td>28'</td></tr> <tr><td>Soft white sandrock</td><td>28'</td><td>30'</td></tr> <tr><td>Brown soft sandrock</td><td>30'</td><td>38'</td></tr> <tr><td>Limestone-grey</td><td>38'</td><td>40'</td></tr> <tr><td>Grey shale</td><td>40'</td><td>75'</td></tr> <tr><td>Light brown sandrock</td><td>75'</td><td>130'</td></tr> <tr><td>shale brown</td><td>130'</td><td>131'</td></tr> <tr><td>Light brown sandrock</td><td>131'</td><td>133'</td></tr> <tr><td colspan="3">Water @ - 75'-90' - 110'-120' - 130'</td></tr> </tbody> </table>			From	To	Brown Clay & Gravel	0'	15'	Brown Clay	15'	28'	Soft white sandrock	28'	30'	Brown soft sandrock	30'	38'	Limestone-grey	38'	40'	Grey shale	40'	75'	Light brown sandrock	75'	130'	shale brown	130'	131'	Light brown sandrock	131'	133'	Water @ - 75'-90' - 110'-120' - 130'		
	From	To																																		
Brown Clay & Gravel	0'	15'																																		
Brown Clay	15'	28'																																		
Soft white sandrock	28'	30'																																		
Brown soft sandrock	30'	38'																																		
Limestone-grey	38'	40'																																		
Grey shale	40'	75'																																		
Light brown sandrock	75'	130'																																		
shale brown	130'	131'																																		
Light brown sandrock	131'	133'																																		
Water @ - 75'-90' - 110'-120' - 130'																																				
WELL TEST* Pre-Pumping Static Level <u>40</u> ft. Date <u>4-18-00</u> Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other <u></u> ☒ Air ☐ Bailing ☐ Pumping* ☐ Other <u></u> Test Rate <u>1.8</u> gpm Duration of Test <u>12</u> hrs. Feet of Drawdown <u>30</u> ft. Sustainable Yield <u>10</u> gpm *(Attach a copy of the pumping test record, per section 1521.05, ORC) Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No Quality <u>Clear</u>																																				
PUMP/PITLESS Type of pump <u>Submersible</u> Capacity <u>10</u> gpm Pump set at <u>100</u> ft. Pitless Type <u>Baker - 4'</u> Pump installed by <u>Water Systems Ent</u> I hereby certify the information given is accurate and correct to the best of my knowledge. Drilling Firm <u>Water Systems</u> Address <u>2817 Leo Ave SW</u> City, State, Zip <u>Canton OH 44706</u> Signed <u>[Signature]</u> Date <u>4-18-00</u> ODH Registration Number <u>204-02484</u>		*(If more space is needed to complete drilling log, use next consecutively numbered form.) Date of Well Completion <u>4-18-00</u> Total Depth of Well <u>135</u> ft.																																		