

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

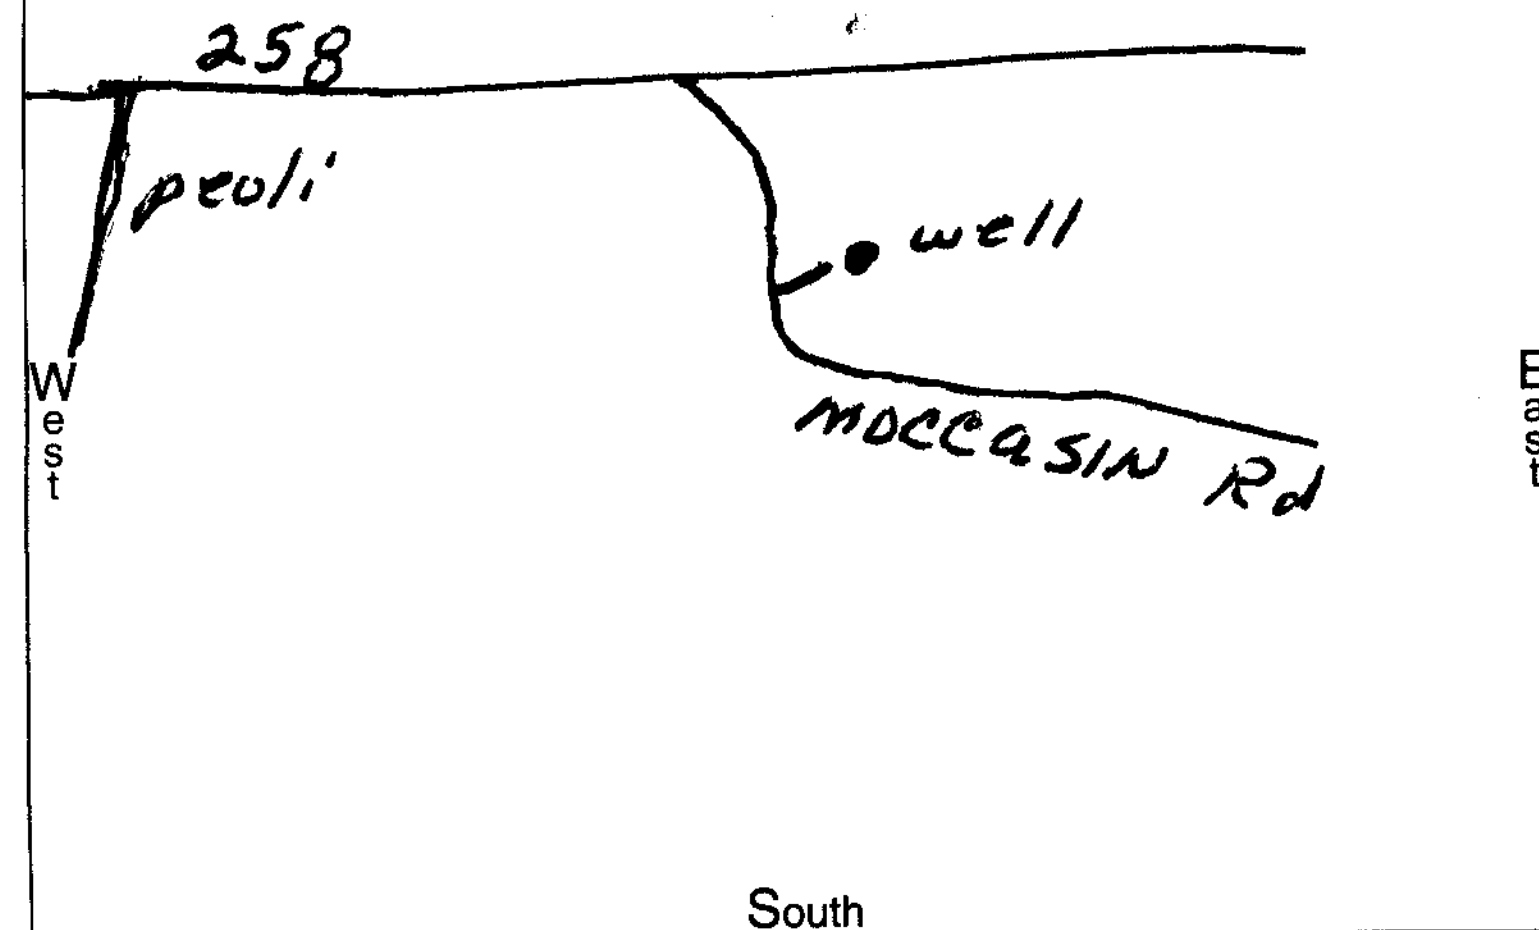
WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

891604

WELL LOCATION

CONSTRUCTION DETAILS

County Guernsey Township WashingtonOwner/Builder Thomas Victor Simmerman
(Circle One or Both) First LastAddress of Well Location 76930 Moccasin Rd
Number Street NameCity Freeport Zip Code +4Permit No. 5 Section/Lot No. 5
(Circle One or Both)Location of Well in State Plane coordinates, if available: Use of Well DwellingN ☐ X +/- ft. or mS ☐ Y +/- ft. or mElevation of Well +/- ft. or mDatum Plain: ☐ NAD27 ☐ NAD83 Elevation Source Source of Coordinates: ☐ GPS ☐ Survey ☐ Other Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:
North

WELL TEST*

Pre-Pumping Static Level 65 ft. Date 7/26/99Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other ☐ Air ☒ Bailing ☐ Pumping* ☐ Other Test Rate I gpm Duration of Test 1 1/2 hrs.Feet of Drawdown Dry ft. Sustainable Yield gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ NoQuality

PUMP/PITLESS

Type of pump Capacity gpmPump set at ft. Pitless Type Pump installed by owner

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Waggoner DrillingAddress Kimbolton, OH 43749City, State, Zip 72201 Old 21 Rd.Signed Andrew Waggoner Date 7/26/99ODH Registration Number 373☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 8 inches Depth 150 ft.Casing Diameter 8 in. Length 26 ft. Thickness SDR in.2 ☐ Borehole Diameter inches Depth ft.Casing Diameter in. Length ft. Thickness in.Casing Height Above Ground ft.Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐ Other 2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐ Other 2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other SCREEN (140') 6" PVC Liner SDR26Diameter Slot Size Screen Length ft.Type Material Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used Method of Installation Depth: Placed FROM ft. TO ft.

GROUT

Material Benseal Volume/Weight Used 180 #Method of Installation pourDepth: Placed FROM 25 ft. TO surface ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown shale soft	0	18
Brown Rock	18	28
Gray shale	28	42
Gray sandstone	42	58
shell	58	59
Gray soft shale	59	76
Dark Brown shale	76	115
Red shale	115	116
Gray shale	116	122
Dark Brown shale	122	125
Gray shale	125	136
Light shale	136	150

Water 72 - 110

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 7/26/99 Total Depth of Well 150 ft.