

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

894462

WELL LOCATION

CONSTRUCTION DETAILS

County Ashtabula Township Austinburg

Owner/Builder Tim Peterson
(Circle One or Both) First Last

Address of Well Location 1041 State Rt. 45
Number Street Name

City Austinburg Zip Code +4 44010

Permit No. 194 Section/Lot No. 1
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well Home

N ☐ X +/- ft. or m


S ☐ Y +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

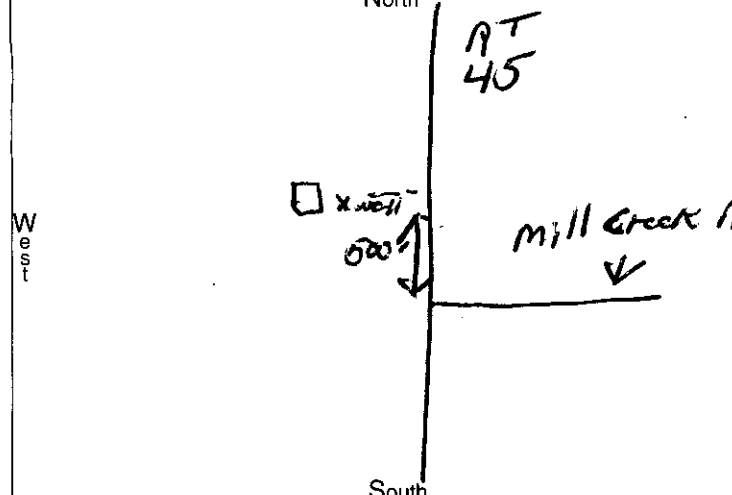

WELL TEST*

Pre-Pumping Static Level 55 ft. Date 12-2-03

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 25 gpm Duration of Test 2 1/2 hrs.

Feet of Drawdown 70 ft. Sustainable Yield 6 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality Good

PUMP/PITLESS

Type of pump Capacity gpm

Pump set at ft. Pitless Type

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm L. L. Hall Well Drilling

Address 14140 Castle Road

City, State, Zip Guy's Mills, PA 16327

Signed Lorance L. Hall Date 12-2-03

Registration Number 1513

SELF TRANSCRIBING
PRESS HARD

Columbus, Ohio

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 8 inches Depth 123 ft.

Casing Diameter 8 5/8 in. Length 108 ft. Thickness 188 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 24" ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material Bentonite Volume/Weight Used 150 lb

Method of Installation Dry Driven

Depth: Placed FROM 0 ft. TO 25 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

From To

Brown clay 0 18

Gray clay & Gravel 18 77

Gravel with Gray clay 77 103

Fine Gravel 103 105

Soft Gray shale 105 119

Hard Gray shale 119 123