

895654

Ohio Department of Natural Resources  
Division of Water, 1939 Fountain Square Drive  
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

County Richland Township Worthington

Owner/Builder Heath Whitehair

Address of Well Location 4550 Harris Rd

City Butler Zip Code +4 44922

Permit No. 98-143 Section/Lot No.

Location of Well in State Plane coordinates, if available:  Use of Well

N ☐ X  +/-  ft. or m


S ☐ Y  +/-  ft. or m

Elevation of Well  +/-  ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat:  Long:

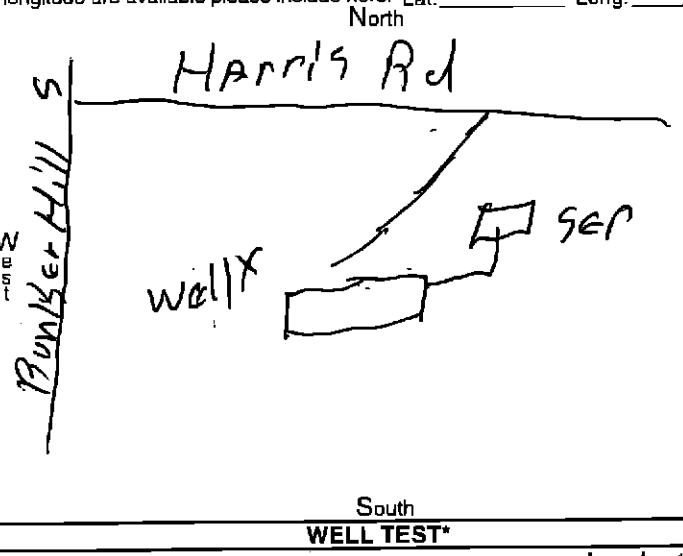

Well Test\*

Pre-Pumping Static Level 41 ft. Date 10/10/98

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping\* ☐ Other

Test Rate 10 gpm Duration of Test 2 hrs hrs.

Feet of Drawdown 30 ft. Sustainable Yield  gpm

\*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☐ No

Quality Clear

PUMP/PITLESS

Type of pump SUB Capacity 12 gpm

Pump set at 96 ft. Pitless Type ADAPTOR

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm SPARKS Drilling

Address 2157 Snyder Rd

City, State, Zip Butler OH 44922

Signed Mike Sparks Date 10/10/98

ODH Registration Number 1489

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 9 inches Depth 53-6 ft.

Casing Diameter 5 in. Length 53-6 ft. Thickness 7/16 in.

2 ☐ Borehole Diameter 5 inches Depth  ft.

Casing Diameter  in. Length  ft. Thickness  in.

Casing Height Above Ground 1 FT

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐ Other

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter  Slot Size  Screen Length  ft.

Type  Material

Set Between  ft. and  ft.

GRAVEL PACK (Filter Pack)

Material/Size  Volume/Weight Used

Method of Installation

Depth: Placed FROM  ft. TO  ft.

GROUT

Material Bent Volume/Weight Used 250

Method of Installation slurry Pumped From Bottom

Depth: Placed FROM 53 ft. TO 5 ft.

DRILLING LOG\*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

|                      | From | To |
|----------------------|------|----|
| Topsoil Bin          | 0    | 2  |
| Layered ss yell clay | 2    | 40 |
| Grey clay silty ss   | 40   | 94 |

\*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 10/10/98 Total Depth of Well 94 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.  
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971