


Owner/Builder STEVE & SARA VASH
(Circle One or Both) First Last
Address of Well Location 1393 BRIMFIELD DRIVE
City KENT, OHIO Zip Code +4 44240
Permit No. Section/Lot No.
(Circle One or Both)
Location of Well in State Plane coordinates, if available: Use of Well Residential
N ☒ X +/- ft. or m
S ☐ Y +/- ft. or m
Elevation of Well +/- ft. or m
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source
Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:
North

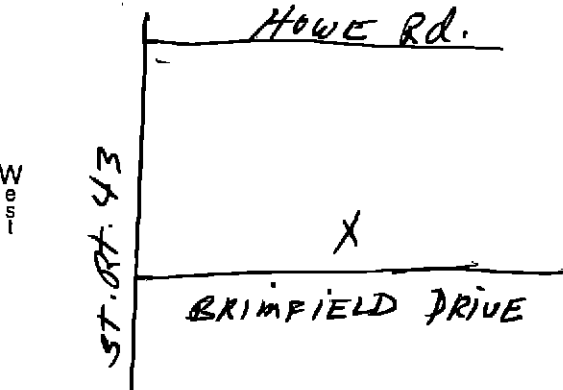

South
WELL TEST*
Pre-Pumping Static Level 33 ft. Date NOV. 2, 2000
Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other
☐ Air ☒ Bailing ☒ Pumping* ☐ Other
Test Rate 14 gpm Duration of Test 3 hrs.
Feet of Drawdown 46 ft. Sustainable Yield 14 gpm
(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No
Quality CLEAR

PUMP/PITLESS
Type of pump SUBMERSIBLE Capacity 10 gpm
Pump set at 28 ft. Pitless Type BRASS DICKENS
Pump installed by MIKE HERR WELLS PUMP

I hereby certify the information given is accurate and correct to the best of my knowledge.
Drilling Firm MIKE HERR WELLS PUMP
Address P.O. BOX 84
City, State, Zip MANTUA, OHIO 44255

Signed Mike Herr Date NOV. 2, 2000
ODH Registration Number #903

☐ Borehole Diameter 6" inches Depth 94.5 ft.
Casing Diameter 5 9/16 ID in. Length ft. Thickness .188 in.
☐ Borehole Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground 15 in. ft.
Type ☒ Steel ☐ Galv. ☐ PVC ☐ Other
2 ☐ 2 ☐ 2 ☐ 2 ☐ Other
Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other
2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

SCREEN
Diameter NONE Slot Size Screen Length ft.
Type Material
Set Between ft. and ft.

GRAVEL PACK (Filter Pack)
Material/Size NONE Volume/Weight Used
Method of Installation
Depth: Placed FROM ft. TO ft.

GROUT
Material BENTONITE Volume/Weight Used 250#
Method of Installation DIRECT CASING PUMP
Depth: Placed FROM 49.5 ft. TO SURFACE ft.

DRILLING LOG*		
INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.		
Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.	From	To
TOP SOIL	0	1
DIRT, SAND, Yellow Clay	1	18
SAND ROCK (SOFT)	18	42
FINE SAND & GRAVEL (H ₂ O)	42	47
SHARPER SANDSTONE / SHALE MIX	47	56
HARD SHALE	59	94.5

4 gpm @ 47'
14 gpm @ 94.5'

(If more space is needed to complete drilling log, use next consecutively numbered form.)
Date of Well Completion NOV. 2, 2000 Total Depth of Well 94.5 ft.