

WELL LOG AND DRILLING REPORT

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

913186

WELL LOCATION

County COSHOCTON Township OXFORD

Owner/Builder DONALD E. ALLEN
(Circle One or Both) First Last

Address of Well Location 22311 SR 751
Number Street Name

City WEST LAFAYETTE OH Zip Code +4 43845

Permit No. 2002-130 Section/Lot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well

N ☐ X ☐ +/- ft. or m


S ☐ Y ☐ +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long: North

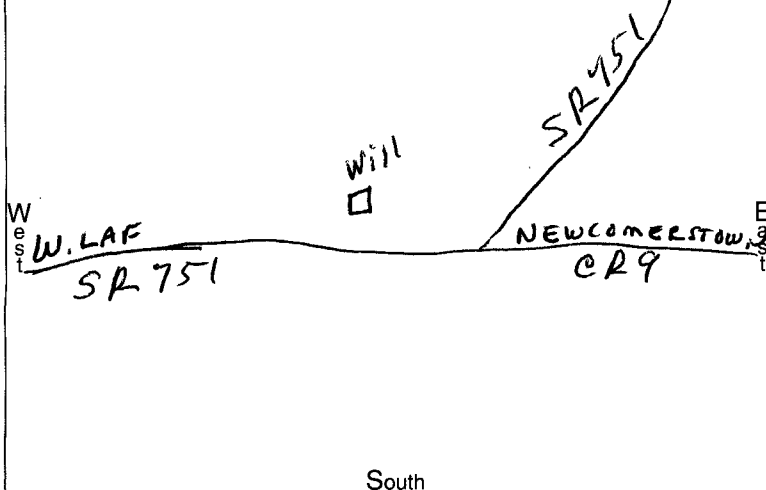

WELL TEST*

Pre-Pumping Static Level 20 ft. Date 10-30-02

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 40 gpm Duration of Test 2 hrs.

Feet of Drawdown NONE ft. Sustainable Yield gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality

PUMP/PITLESS

Type of pump Submersible Capacity 10 gpm

Pump set at 40 ft. Pitless Type ADAPTOR - DICKINSON

Pump installed by WILLIAM L. BOWEN

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm BOWEN EXCAVATING + DRILLING

Address 45251 USR 36

City, State, Zip COSHOCTON OH 43812

Signed William L Bowen

Date 5-15-03

ODH Registration Number 365

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter DRIVE PIPE inches Depth 48 ft.

Casing Diameter 5 in. Length 48 ft. Thickness 1/4 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 20" ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 5" Slot Size 1/8" Screen Length 6 ft.

Type STEEL Material STEEL

Set Between 40 ft. and 47 ft.

GRAVEL PACK (Filter Pack)

Material/Size N/A Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material BEACONITE Volume/Weight Used 80 lbs

Method of Installation POURED AROUND CASING

Depth: Placed FROM DRIVE PIPE ft. TO ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

From To

SAND + GRAVEL
WELL

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 11-10-02 Total Depth of Well 48 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy