

Δ

DNR 7802.96

WELL LOG AND DRILLING REPORT

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

914461

WELL LOCATION

County LICKING Township HANOVER TWP

Owner/Builder BENNY NEBY
(Circle One or Both) First Last
Address of Well Location 4123 FRANCIS RD. NE.
Number Street Name

City NEWARK OH Zip Code +4 43055

Permit No. 2175 Section/Lot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well PT. DWELLING

N ☒ X 40 05.650 +/- ft. or m


S ☐ Y 82 20.116 +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here. Lat: Long:

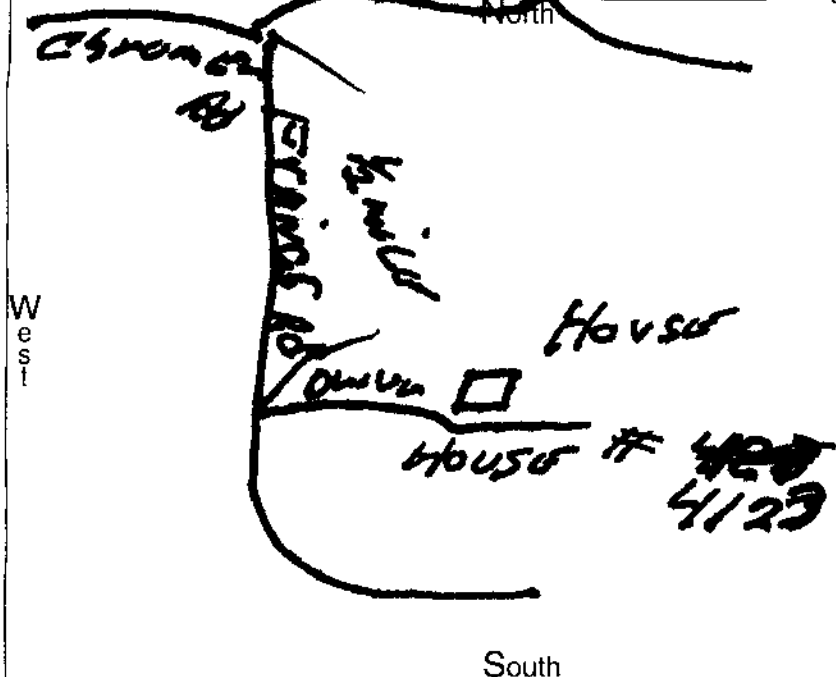

WELL TEST*

Pre-Pumping Static Level 100 ft. Date Nov. 21-2006

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☒ Pumping* ☐ Other

Test Rate 20 gpm Duration of Test 1 hrs.

Feet of Drawdown 20 ft. Sustainable Yield 20 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality CLEAR NO OIL NO SAND

PUMP/PITLESS

Type of pump SUMER 4660 Capacity 12 gpm

Pump set at 280 ft. Pitless Type SIMMONS

Pump installed by L.R. ASHCRAFT ASHCRAFT DRILLING

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm ASHCRAFT DRILLING

Address 10578 HAZEL DOLL RD NE

City, State, Zip

Signed Robert R. Ashcraft

Date 12-12-06

ODH Registration Number 1188

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 5 1/2 in. inches Depth 120 ft. ft.

Casing Diameter 5 1/2 in. Length 120 ft. Thickness in.

2 ☐ Borehole Diameter in. inches Depth 120 ft. ft.

Casing Diameter 5 1/2 in. Length 120 ft. Thickness in.

Casing Height Above Ground 18 ft. ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 2 Slot Size X Screen Length X ft.

Type Material

Set Between AT 120 ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size NO Volume/Weight Used NO

Method of Installation NO

Depth: Placed FROM NO ft. TO NO ft.

GROUT

Material BENTONITE Volume/Weight Used

Method of Installation POWER PUMP

Depth: Placed FROM 120 ft. TO SEPPERS ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
DRIFT	0	40'
Rock & crinoids	40'	100'
GRAY SHALE	100'	260'
	260'	300'

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy