

WELL LOG AND DRILLING REPORT

916388


TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

WELL LOCATION

County WARREN Township FRANKLIN
Owner/Builder WILLIAM F. KELLY
Address of Well Location 8450 5657 HONT HORNE LN
City CARLISLE, OHIO Zip Code 45005
Permit No. 86-2003 Section/Lot No. SINGLE FAMILY
Location of Well in State Plane coordinates, if available: N ☐ X ☐ S ☐ Y ☐ Elevation of Well ft. or m
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source
Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

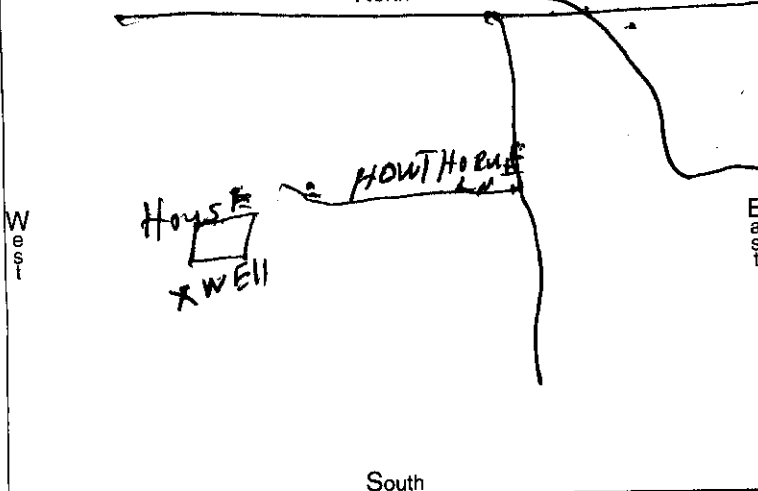

WELL TEST*

Pre-Pumping Static Level 20 ft. Date 10-15-2003
Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other
☐ Air ☒ Bailing ☐ Pumping* ☐ Other
Test Rate 20 gpm Duration of Test 3 hrs.
Feet of Drawdown 20 ft. Sustainable Yield 15 gpm
*(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ No
Quality CLEAR

PUMP/PITLESS

Type of pump Sub-Later Capacity gpm
Pump set at ft. Pitless Type
Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.
Drilling Firm JAMES E. GILBERT
Address 13049 FRIEND RD.
City, State, Zip GERMANTOWN, OH 45321
Signed James Gilbert Date 10-15-2003
ODH Registration Number 000533

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
1 ☐ Borehole Diameter inches Depth ft.
Casing Diameter 60P in. Length 62 ft. Thickness in.
2 ☐ Borehole Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground 1 1/2 ft.
Type 1 ☐ Steel 1 ☒ Galv. 1 ☐ PVC 1 ☐ Other
2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other
Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐ Other
2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 4" Slot Size 20,000 Screen Length 5 ft.
Type PVC Material
Set Between 60 ft. and 62 ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used
Method of Installation
Depth: Placed FROM ft. TO ft.

GROUT

Material General Volume/Weight Used 100 ft.
Method of Installation dry around casing
Depth: Placed FROM 0 ft. TO 55 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.		From	To
Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.			
BT CLAY - SOME GRAVEL		0	14
DL CLAY - GRAVEL		14	91
PL CLAY - SAND		3	42
BL CLAY - GRAVEL		4	23.5
WATER - SAND + GRAVEL		5	62

*(If more space is needed to complete drilling log, use next consecutively numbered form.)
Date of Well Completion 10-15-2003 Total Depth of Well 62 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy