

TYPE OR USE PEN  
SELF TRANSCRIBING  
PRESS HARD

Ohio Department of Natural Resources  
Division of Water, 1939 Fountain Square Drive  
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

917319

WELL LOCATION

County Licking Township Hartford

Owner/Builder  
(Circle One or Both) Guy White  
First Last


Address of Well Location  
Number 77 Street Name High Street

City Croton Zip Code +4 43013

Permit No. 8015 Section/Lot No.  
(Circle One or Both)

Location of Well in State Plane coordinates, if available:  
N ☒ X 40° +/- 14.34 ft. or m  
E ☒ Y 082° +/- 41.25 ft. or m  
Elevation of Well +/- 110.3 ft. or m  
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source GPS  
Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: \_\_\_\_\_ Long: \_\_\_\_\_  
North

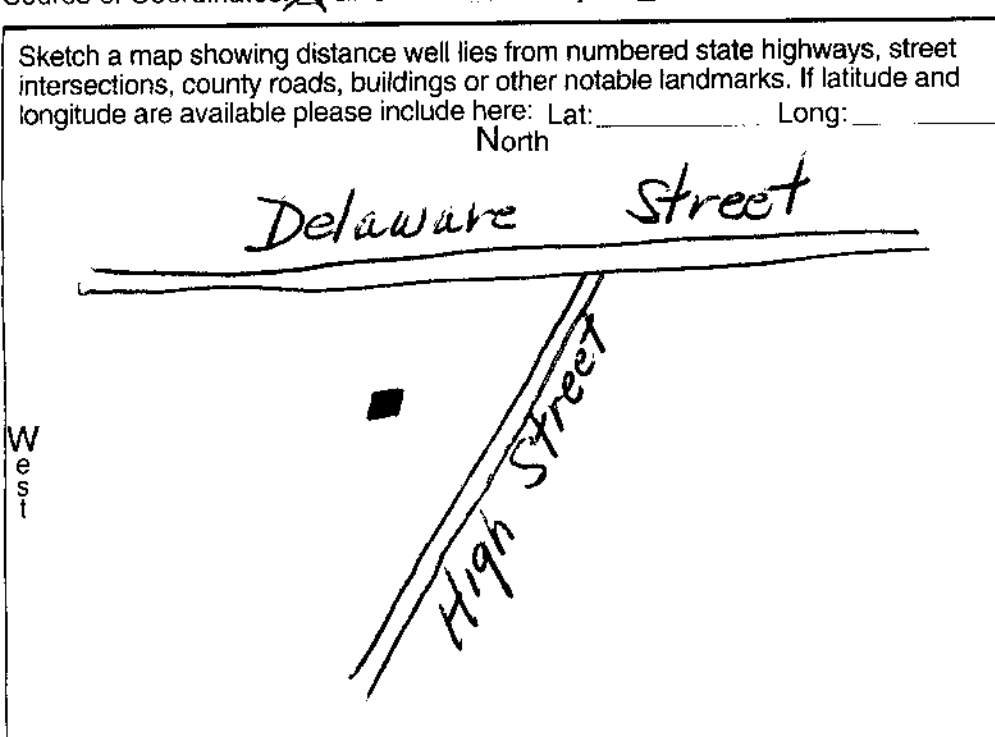

West East

South

WELL TEST\*

Pre-Pumping Static Level 40 ft. Date 9-18-05

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping\* ☐ Other

Test Rate 10 gpm Duration of Test \_\_\_\_\_ hrs.

Feet of Drawdown 0 ft. Sustainable Yield 10 gpm

\*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality clear

PUMP/PITLESS

Type of pump 1/2 HP Submersible Capacity 10 gpm

Pump set at 60 ft. Pitless Type adapter

Pump installed by W Garrabrant

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Garrabrant Well Drilling

Address 7749 Concord Rd.

City, State, Zip Johnstown, Oh 43031

Signed Walter J. Garrabrant Date 9-26-05

ODH Registration Number 932

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☒ Borehole Diameter 5 inches Depth 65 ft.

Casing Diameter 5 in. Length 65 ft. Thickness \_\_\_\_\_ in.

2 ☐ Borehole Diameter \_\_\_\_\_ inches Depth \_\_\_\_\_ ft.

Casing Diameter \_\_\_\_\_ in. Length \_\_\_\_\_ ft. Thickness \_\_\_\_\_ in.

Casing Height Above Ground \_\_\_\_\_ ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter \_\_\_\_\_ Slot Size \_\_\_\_\_ Screen Length \_\_\_\_\_ ft.

Type \_\_\_\_\_ Material \_\_\_\_\_

Set Between \_\_\_\_\_ ft. and \_\_\_\_\_ ft.

GRAVEL PACK (Filter Pack)

Material/Size \_\_\_\_\_ Volume/Weight Used \_\_\_\_\_

Method of Installation \_\_\_\_\_

Depth: Placed FROM \_\_\_\_\_ ft. TO \_\_\_\_\_ ft.

GROUT

Material Bentonite Volume/Weight Used 1 Bag

Method of Installation Pour around casing

Depth: Placed FROM Top of ground TO 1' 10" ft.

DRILLING LOG\*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

|                         | From      | To        |
|-------------------------|-----------|-----------|
| <u>yellow clay</u>      | <u>0</u>  | <u>12</u> |
| <u>gray sandy clay</u>  | <u>12</u> | <u>63</u> |
| <u>sand and gravel</u>  | <u>63</u> | <u>65</u> |
| <u>water at 63 feet</u> |           |           |

(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 9-18-05 Total Depth of Well 65 ft.