

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT


Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

917624

WELL LOCATION

County Logan Township Monroe
Owner/Builder Warren Ropp
(Circle One or Both) First Last
Address of Well Location 9353 Tup 1/4
Number Street Name
City West Liberty Zip Code +4 43357
Permit No. Section/Lot No.
(Circle One or Both)
Location of Well in State Plane coordinates, if available:
N ☐ X ☐ +/- ft. or m
S ☐ Y ☐ +/- ft. or m
Elevation of Well +/- ft. or m
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source
Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat North Long:

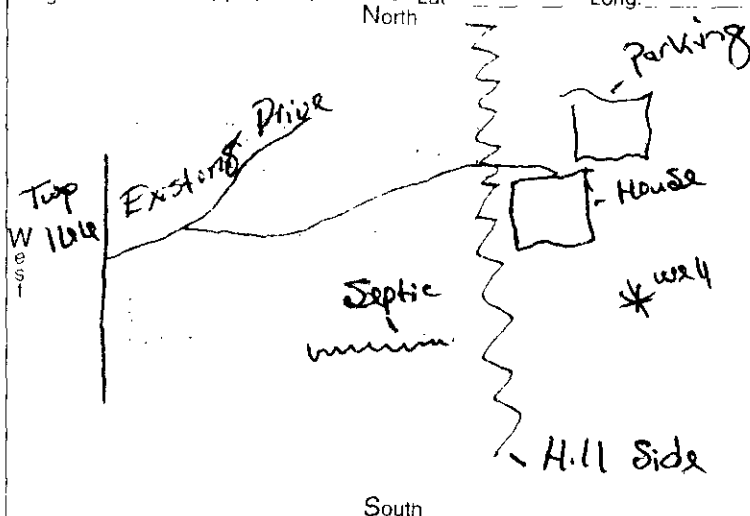

WELL TEST*

Pre-Pumping Static Level 40 ft. Date 11-30-02
Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other
☐ Air ☐ Bailing ☒ Pumping* ☐ Other
Test Rate 10-0 gpm Duration of Test 48 hrs.
Feet of Drawdown 5-10 ft. Sustainable Yield 10-0 gpm
(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☒ No
Quality

PUMP/PITLESS

Type of pump F+H Capacity 10.0 gpm
Pump set at 170 ft. Pitless Type Simmons
Pump installed by Edwards Well & Pump
I hereby certify the information given is accurate and correct to the best of my knowledge.
Drilling Firm Edwards Well & Pump
Address 311 Jefferson Ave
City, State, Zip Urbana Ohio 43078

Signed Benjamin T Edwards Date 11-30-02
ODH Registration Number 02897

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
1 ☐ Borehole Diameter 5 5/8 inches Depth 185 ft.
Casing Diameter 6" in. Length 10 ft. Thickness 5/16 in.
2 ☐ Borehole Diameter _____ inches Depth _____ ft.
Casing Diameter _____ in. Length _____ ft. Thickness _____ in.
Casing Height Above Ground 20" ft.
Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐
2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other
Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐
2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other
SCREEN
Diameter _____ Slot Size _____ Screen Length _____ ft.
Type _____ Material _____
Set Between _____ ft. and _____ ft.
GRAVEL PACK (Filter Pack)
Material/Size _____ Volume/Weight Used _____
Method of Installation _____
Depth: Placed FROM _____ ft. TO _____ ft.
GROUT
Material Bunsal Volume/Weight Used 50 lbs
Method of Installation Pour Around Casing
Depth: Placed FROM 0 ft. TO 185 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Red Clay + Big gravel	0	100
Salt + Pepper Sand	100	115
Grey Clay + Gravel	115	150
Black Shale	150	170
Blue Clay + limestone	170	185
Water	185	