

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503


932575

WELL LOCATION

County Licking Township Bowling Green
Owner/Builder Frank Starkey
(Circle One or Both) First Last
Address of Well Location 11033 Rankin Rd.
Number Street Name
City Brownsville Zip Code 43721
Permit No 7505 Section/Lot No.
(Circle One or Both)
Location of Well in State Plane coordinates, if available: Use of Well Home
N X Y ft. or m.
S Y X ft. or m.
Elevation of Well ft. or m.
Datum Plain: NAD27 | NAD83 Elevation Source
Source of Coordinates: GPS Survey | Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: North Long:

Rankin Rd

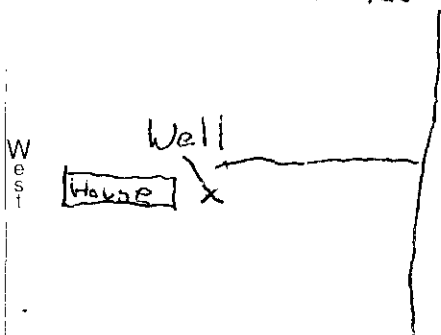

South

WELL TEST*

Pre-Pumping Static Level 70 ft. Date 5-7-02
Measured from: X Top of Casing X Ground Level Other
X Air X Bailing X Pumping Other
Test Rate 0 gpm Duration of Test 4 hrs.
Feet of Drawdown 0 ft. Sustainable Yield 0 gpm
(*Attach a copy of the pumping test record, per section 1521.05 ORC)
Is Copy Attached? Yes No Flowing Well? Yes No
Quality

PUMP/PITLESS

Type of pump Sub Capacity 10 gpm
Pump set at 140 ft. Pitless Type Dickens
Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm H&A Waterwell Drilling
Address 3066 Martinsburg Rd.
City, State, Zip Newark, OH 43055

Signed Kerry A. Beward Jr. Date 5-7-02
ODH Registration Number 1039

CONSTRUCTION DETAILS

Rotary X Cable X Augered Driven Other
BOREHOLE/CASING (measured from ground surface)
1 Borehole Diameter 5 5/8 inches Depth 255 ft.
Casing Diameter 5 5/8 in. Length 65 ft. Thickness 1250 in.
2 Borehole Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground 14 ft.
Type 1 X Steel 1 Galv. 1 PVC 1 Other
2 2 2 2
Joints 1 X Threaded 1 Welded 1 Solvent 1 Other
2 2 2 2
SCREEN
Diameter Slot Size Screen Length ft.
Type Material
Set Between ft. and ft.
GRAVEL PACK (Filter Pack)
Material/Size Volume/Weight Used
Method of Installation
Depth: Placed FROM ft. TO ft.
GROUT
Material Benseal Volume/Weight Used 40 lb.
Method of Installation Drive Pipe
Depth: Placed FROM 0 ft. TO 65 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Top Soil	0	8
Brown Shale	8	24
Gray Shale	24	60
limestone	60	65
Gray Sandstone	65	180
Brown Sandstone	180	185
Gray Sandstone	185	210
INJUN Sand	210	255

(*If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 2-2-02 Total Depth of Well 255 ft.