

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

934277

WELL LOCATION

County Hamilton Township Anderson

Owner/Builder Jim + Nancy Vanpelt
(Circle One or Both) First Last

Address of Well Location 302 3rd St. Shadmoore Park
Number Street Name

City Cinti Zip Code +4 5244

Permit No. 2001017 Section/Lot No.
(Circle One or Both)

Location of Well in State Plane
coordinates, if available:

N ☐ X ☐ +/- ft. or m


S ☐ Y ☐ +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

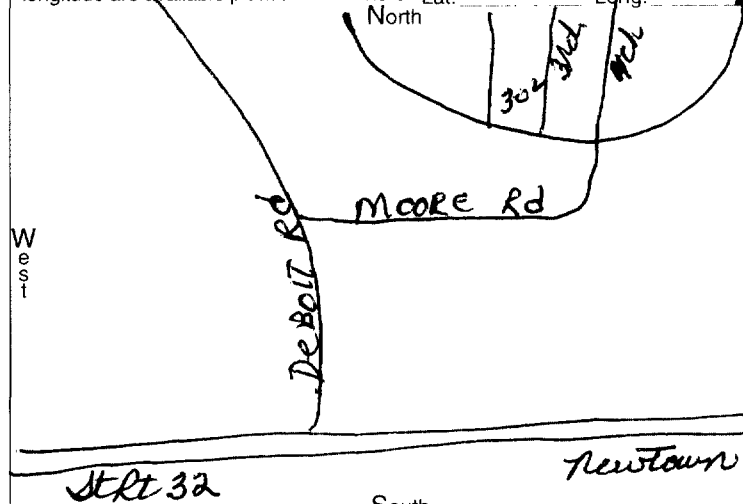

WELL TEST*

Pre-Pumping Static Level 22 ft. Date

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☐ Bailing ☒ Pumping* ☐ Other

Test Rate 20 gpm Duration of Test 4 hrs.

Feet of Drawdown ft. Sustainable Yield gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ No

Quality Clear

PUMP/PITLESS

Type of pump Capacity gpm

Pump set at ft. Pitless Type

Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Pete Creeper Well Drillers

Address 4555 Clermont Ln

City, State, Zip Batavia OH 45123

Signed Thomas Creeper Jr Date 7-12-01

ODH Registration Number 659

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 6 1/4" inches Depth 21 ft.

Casing Diameter 6 1/4" in. Length ft. Thickness in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 18" ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter 5" Slot Size 30000 Screen Length 4 ft.

Type Material Stainless Steel

Set Between 21 ft. and 25 ft.

GRAVEL PACK (Filler Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material Benseal Volume/Weight Used 50 lb

Method of Installation Dry Poured

Depth: Placed FROM 0 ft. TO 15 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

Top Soil
Muddy Sand
Sand & Gravel

From To

0 12

12 15

15 25