

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

936440

WELL LOCATION

County Perry Township Monday Creek

Owner/Builder DUANE STRETTON
(Circle One or Both) First Last

Address of Well Location 8340 Dutch Ridge Rd
Number Street Name

City New Stratsville Zip Code +4 43746

Permit No. 3 Section Lot No. 21
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well domestic

N ☒ X +/- ft. or m


S ☐ Y +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

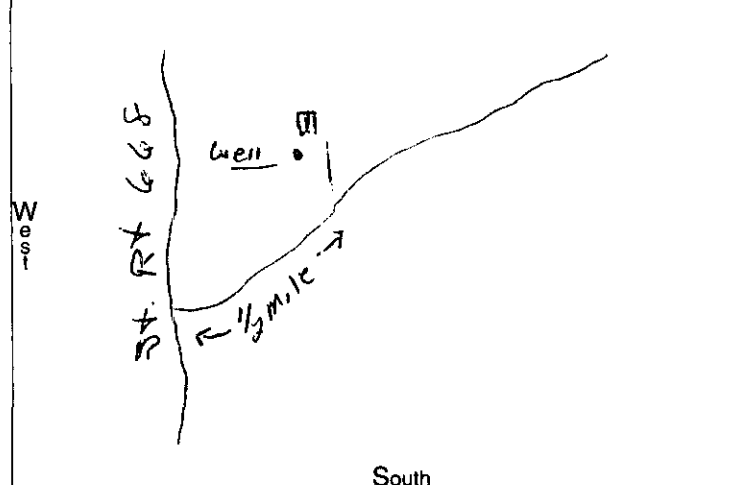

WELL TEST*

Pre-Pumping Static Level 128 ft. Date 2-22-02

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☒ Air ☐ Bailing ☐ Pumping* ☐ Other

Test Rate 5 gpm Duration of Test 1 hrs.

Feet of Drawdown Total ft. Sustainable Yield 5 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality Clear

PUMP/PITLESS

Type of pump Submersible Capacity 10 gpm

Pump set at 240 ft. Pitless Type Pull Through

Pump installed by PECK DRIG.

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm CARL PECK WATER WELL DRIG.

Address 11367 ST. RT 93N

City, State, Zip LOGAN OH 43138

Signed Carl Peck Date 3-1-02

ODH Registration Number 266

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 8 inches Depth 138 ft.

Casing Diameter 5 in. Length 138 ft. Thickness SOR22A

2 ☐ Borehole Diameter 4 7/8 inches Depth 138-270 ft.

Casing Diameter open hole Length ft. Thickness in.

Casing Height Above Ground 12 + 1 IN

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐ Other

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material GROUT Well Volume/Weight Used 6 bags

Method of Installation Tremied

Depth: Placed FROM 138 ft. TO SURFACE ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

From To

Brown Clay + Shale 0 9

Red Sandstone 9 12

Gray Limestone 12 13

Gray Clay 13 18

White Clay 18 28

Gray Shale 28 70

Black Shale 70 75

Gray Shale 75 95

Limestone + Green Shale 95 105

Gray Limestone 105 111

Black Shale 111 116

Gray Sandy Shale 116 255

Gray to White Sandstone 255 270

Water @ 258' 56 gpm