

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

940514

WELL LOCATION

County Hancock Township Liberty
Owner/Builder THOMAS HINGSON
Address of Well Location 8305 TR 89
City Findlay Zip Code +4 45840
Permit No. 103-02 Section/Lot No. 103-02

Location of Well in State Plane
coordinates, if available:

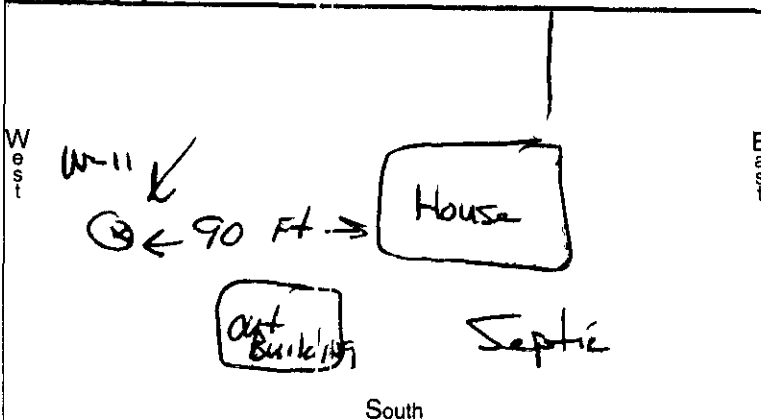
N ☐ X 41° 02' 64" N +/- ft. or m
S ☐ Y 83° 43' 35" W +/- ft. or m
Elevation of Well 804 FT +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:
North

TR 89

**WELL TEST***

Pre-Pumping Static Level 165 ft. Date 9/22/02
Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other
☒ Air ☐ Bailing ☐ Pumping* ☐ Other
Test Rate 38 gpm Duration of Test 1 1/2 hrs.
Feet of Drawdown — ft. Sustainable Yield 38 gpm
*(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No
Quality good, clear water

PUMP/PITLESS

Type of pump Capacity gpm
Pump set at ft. Pitless Type
Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm GLASSER Well Drilling
Address 3613 E.R. 613
City, State, Zip MC COMB OHIO 45858

Signed Shirley M. Me Date 10/19/02
ODH Registration Number 1458

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
1 ☒ Borehole Diameter 9 1/4 inches Depth 25 ft.
Casing Diameter 6 in. Length 25 ft. Thickness 1/2 in.
2 ☐ Borehole Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground 1 1/2 ft.

Type 1 ☐ Steel 1 ☐ Galv. ☒ PVC 1 ☐
2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other
Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐
2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.
Type Material
Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used
Method of Installation
Depth: Placed FROM ft. TO ft.

GROUT

Material Beston / 1/2 mud Volume/Weight Used 100 lb
Method of Installation Tremie Pipe
Depth: Placed FROM 0 ft. TO 25 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown Sandy Clay	0	9
Gray Clay	9	16
Gray Sand, Gravel	16	18
Gray Limestone	18	42 1/2

(If more space is needed to complete drilling log, use next consecutively numbered form.)
Date of Well Completion 9/22/02 Total Depth of Well 42 1/2 ft.