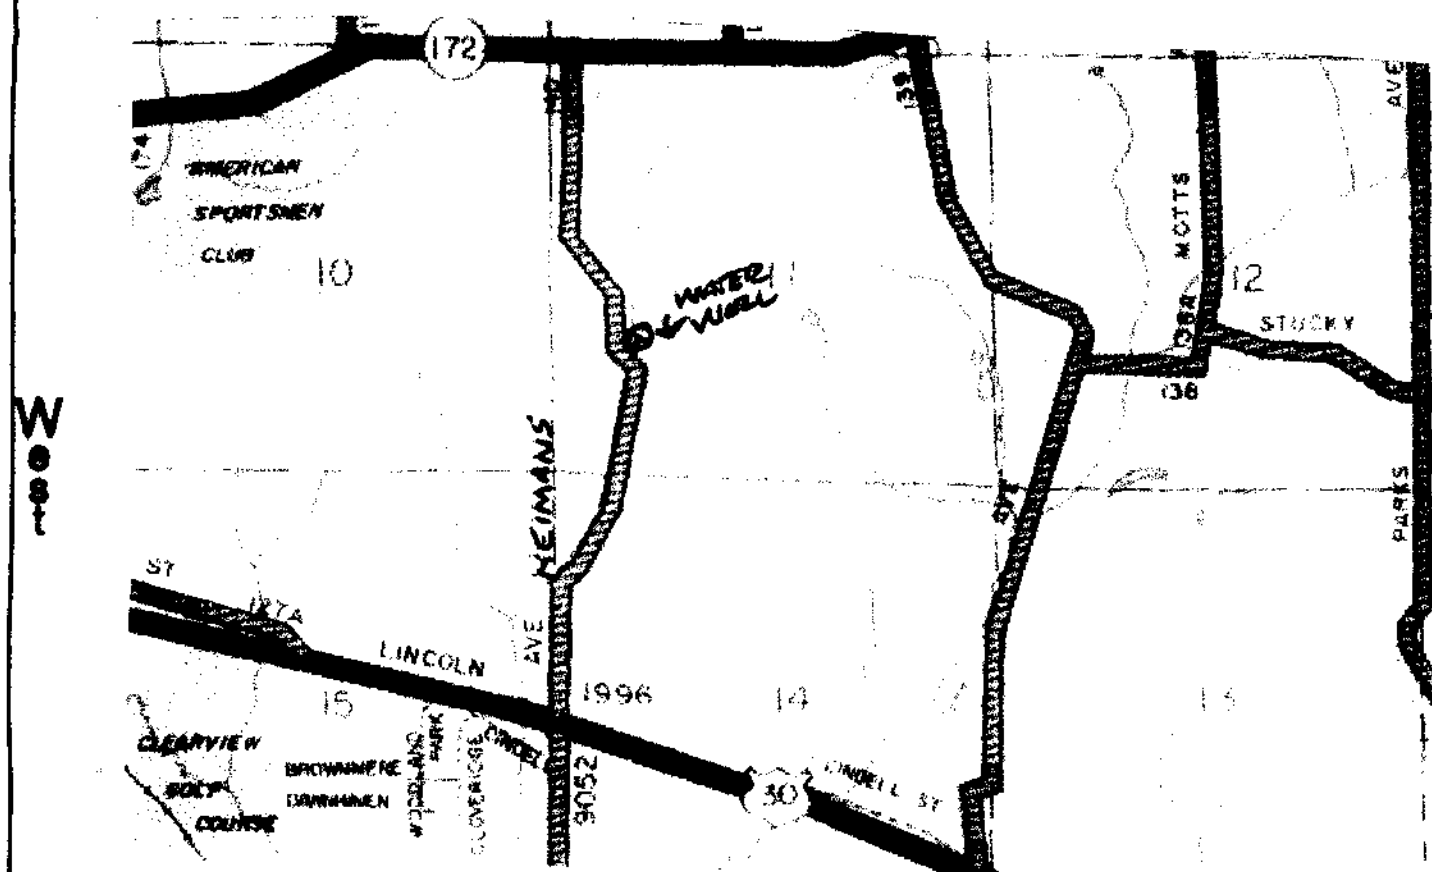


TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD**WELL LOG AND DRILLING REPORT**Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

942194

WELL LOCATIONCounty STARIC Township OSNABERGOwner/Builder DUDE NELSON
(Circle One or Both) First LastAddress of Well Location 850 NEIMANS AVE. S.E.
Number Street NameCity EAST CANTON Zip Code +4 44730-9773Permit No. 21085 347217 Section/Lot No. 1/1
(Circle One or Both)Location of Well in State Plane coordinates, if available: Use of Well RESIDENTIALN ☐ X 4515101 N +/- 20 ft. or mS ☐ Y 480529 E +/- 20 ft. or mElevation of Well 1142 +/- 5 ft. or mDatum Plain: ☒ NAD27 ☐ NAD83 Elevation SourceSource of Coordinates: ☒ GPS ☐ Survey ☐ OtherSketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 40°47'19"N Long: 80°13'51"W**WELL TEST***Pre-Pumping Static Level 17 ft. Date 11.13.03Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other☐ Air ☒ Bailing ☐ Pumping* ☐ OtherTest Rate 24 gpm Duration of Test 1.5 hrs.Feet of Drawdown 68 ft. Sustainable Yield 20 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ NoQuality CLEAR 7.3 PH 1.5 Fe 12 G.R.O. HARDNESS**PUMP/PITLESS**Type of pump SUBMERSIBLE Capacity 10 gpmPump set at 85 ft. Pitless Type ADAPTERPump installed by HINTON DRILLING CO.

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm HINTON DRILLING CO.Address 2060 BURROW RD. S.W.City, State, Zip CARROLLTON, OH, 44615-8236Signed Mark Hinton Date 11.18.03ODH Registration Number 151**CONSTRUCTION DETAILS**☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other**BOREHOLE/CASING** (measured from ground surface)1 ☒ Borehole Diameter 6.5 inches Depth 102 ft.Casing Diameter 7" O.D. in. Length 53 ft. Thickness .272 in.2 ☐ Borehole Diameter _____ inches Depth _____ ft.

Casing Diameter _____ in. Length _____ ft. Thickness _____ in.

Casing Height Above Ground 1.4 ft.Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ OtherJoints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other**SCREEN**

Diameter _____ Slot Size _____ Screen Length _____ ft.

Type N/A Material _____

Set Between _____ ft. and _____ ft.

GRAVEL PACK (Filter Pack)

Material/Size _____ Volume/Weight Used _____

Method of Installation N/A

Depth: Placed FROM _____ ft. TO _____ ft.

GROUTMaterial BENSEAL Volume/Weight Used 160*Method of Installation DRY POUR AS DRIVEN METHODDepth: Placed FROM 51.8 ft. TO SURFACE ft.**DRILLING LOG***

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
BROWN SAND AND GRAVEL	0	11
BOULDERS	11	13
BROWN SAND AND GRAVEL	13	32
GRAY HOUVING SAND AND GRAVEL	32	44
GRAVEL	44	46
STONEY GRAY SHALE	46	49
LIMEY GRAY SANDSTONE	49	67
SANDY GRAY SHALE	67	91
GRAY SHALE	91	102
WATER ENCOUNTERED @ 91'-20 gpm.		
AQUIFER - SHALE		

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 11-13-03 Total Depth of Well 102 ft.Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy