

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

944149

WELL LOCATION

County SUMMIT Township NORTON
Owner/Builder JEANETTE STEWART
(Circle One or Both) First Last
Address of Well Location 3001 RIES ST
Number Street Name
City NORTON Zip Code +4 44203
Permit No. 352528 Section/Lot No.
(Circle One or Both)


Location of Well in State Plane
coordinates, if available:

N ☒ X +/- ft. or m
S ☐ Y +/- ft. or m
Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street
intersections, county roads, buildings or other notable landmarks. If latitude and
longitude are available please include here: Lat: Long:
North

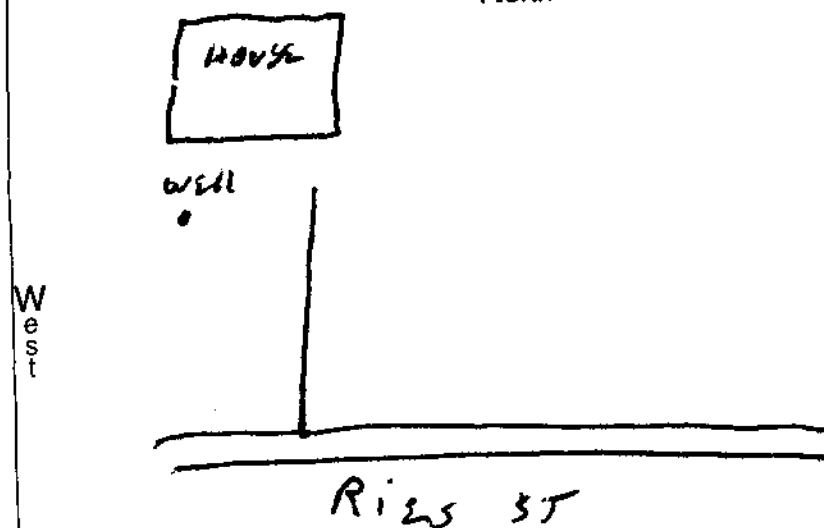

WELL TEST*

Pre-Pumping Static Level 50 ft. Date 6-16-05
Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other
☐ Air ☒ Bailing ☐ Pumping* ☐ Other
Test Rate 15 gpm Duration of Test 1 hrs.
Feet of Drawdown 30 ft. Sustainable Yield 15 gpm
*(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No
Quality CLEAR

PUMP/PITLESS

Type of pump 1/2 HP SUB Capacity 10 gpm
Pump set at 105 ft. Pitless Type SLIDE
Pump installed by TOM MAXWELL

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm LARRY'S WELL DRILLING INC
Address 4034 MANCHESTER RD
City, State, Zip AKRON, OHIO 44319

Signed [Signature] Date 6-27-05
ODH Registration Number

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
1 ☒ Borehole Diameter 5 inches Depth 120 ft.
Casing Diameter in. Length ft. Thickness in.
2 ☐ Borehole Diameter inches Depth ft.
Casing Diameter in. Length ft. Thickness in.
Casing Height Above Ground ft.
Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other
2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other
Joints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐ Other
2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.
Type Material
Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used
Method of Installation
Depth: Placed FROM ft. TO ft.

GROUT

Material BEATONITE Volume/Weight Used 100 #
Method of Installation DRY DRIVEN
Depth: Placed FROM ft. TO 48 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
<u>Yellow clay & Rocks</u>	<u>0</u>	<u>12</u>
<u>BANK RUN</u>	<u>12</u>	<u>35</u>
<u>BROKEN SANDSTONE</u>	<u>35</u>	<u>46</u>
<u>SANDSTONE</u>	<u>46</u>	<u>120</u>

WATER AT 80 FT

If more space is needed to complete drilling log, use next consecutively numbered form.)
Date of Well Completion 6-16-05 Total Depth of Well 120 ft.