

WELL LOG AND DRILLING REPORTTYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503


944376

WELL LOCATIONCounty Ottawa Township Put in BayOwner/Builder David J Parker
(Circle One or Both) First LastAddress of Well Location 258 Toledo Ave
Number Street NameCity Put in Bay Zip Code +4 43456Permit No. 02-030 Section/Lot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available:

Use of Well domesticN ☒ X +/- ft. or mS ☐ Y +/- ft. or mElevation of Well +/- ft. or mDatum Plain: ☐ NAD27 ☐ NAD83 Elevation SourceSource of Coordinates: ☐ GPS ☐ Survey ☐ OtherSketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

North

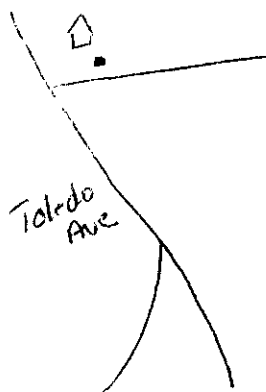

South

WELL TEST*Pre-Pumping Static Level 9 ft. Date 5-10-02Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other☒ Air ☐ Bailing ☐ Pumping* ☐ OtherTest Rate 35-45 gpm Duration of Test 1 hrs.Feet of Drawdown ft. Sustainable Yield gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ NoQuality **PUMP/PITLESS**Type of pump Capacity gpmPump set at ft. Pitless Type Pump installed by another contractor

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm ODDO Water Well DrillingAddress 13962 Mitchell RdCity, State, Zip Bowling Green Oh 43402Signed James WilliamsDate 5-14-02ODH Registration Number 02362**CONSTRUCTION DETAILS**☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other**BOREHOLE/CASING** (measured from ground surface)1 ☐ Borehole Diameter 8 3/4 inches Depth ft.Casing Diameter 6 in. Length 26 ft. Thickness 1/4 in.2 ☐ Borehole Diameter inches Depth ft.Casing Diameter in. Length ft. Thickness in.Casing Height Above Ground 40 ft.Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐ Other2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ OtherJoints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐ Other2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other**SCREEN**Diameter Slot Size Screen Length ft.Type Material Set Between ft. and ft.**GRAVEL PACK** (Filter Pack)Material/Size Volume/Weight Used Method of Installation Depth: Placed FROM ft. TO ft.**GROUT**Material Bentonite Volume/Weight Used 125 lbsMethod of Installation pressure groutedDepth: Placed FROM 25 ft. TO 0 ft.**DRILLING LOG***

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

From To

clay
limestone0 4 1/2'
4 1/2' 60water at 35-45 ft.

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 5-10-02 Total Depth of Well 60 ft.