

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

944647

WELL LOCATION

County Richland Township Weller

Owner/Builder Robert Stoffer
(Circle One or Both)
Address of Well Location 1350 St. Rt. 96
Number Street Name

City Shiloh Zip Code +4 4878

Permit No. 031250 1
Section/Plot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well Residential

N ☐ X

S ☐ Y

ft. or m

ft. or m

Elevation of Well ft. or m


Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:
 North

West

East

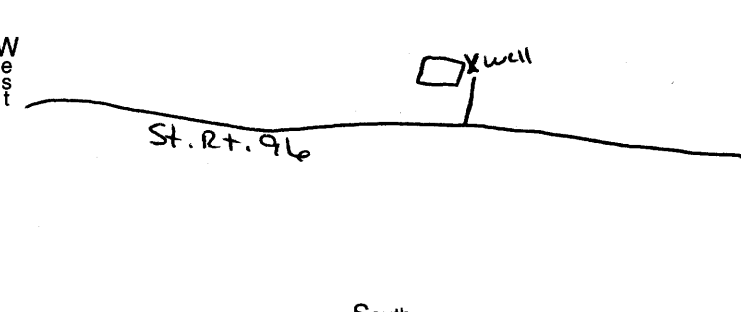

South

WELL TEST*

Pre-Pumping Static Level 65 ft. Date 7-25-03

Measured from: ☐ Top of Casing ☒ Ground Level ☐ Other

☒ Air ☐ Bailing ☐ Pumping* ☐ Other

Test Rate 10 gpm Duration of Test 1 hrs.

Feet of Drawdown ft. Sustainable Yield 10 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ No

Quality clear

PUMP/PITLESS

Type of pump Submersible Capacity 12 gpm

Pump set at 110 ft. Pitless Type Wells

Pump installed by Parker Well Drilling, Inc.

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Parker Well Drilling, Inc.

Address 8855 Ross Rd.

City, State, Zip Lexington, OH 44904

Signed Fred Roshlich Date 8-4-03

ODH Registration Number 2046

CONSTRUCTION DETAILS

☒ Rotary ☐ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 7 7/8 inches Depth 56 ft.

Casing Diameter 5 in. Length 57 ft. Thickness 0.21 in.

2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 1

Type

1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐

2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ Other

1 ☐ Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐

2 ☐ Joints 2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material EZ mud Ben Seal Volume/Weight Used 100 lbs

Method of Installation Pumped Tremie

Depth: Placed FROM 56 ft. TO 0 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation: sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
<u>Yellow Clay & Gravel</u>	<u>0</u>	<u>16</u>
<u>Gray clay & Gravel</u>	<u>16</u>	<u>40</u>
<u>Blue Soft Shale</u>	<u>40</u>	<u>46</u>
<u>Blue Hard Shale</u>	<u>46</u>	<u>68</u>
<u>Gray Sandy Shale</u>	<u>68</u>	<u>120</u>

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 7-25-03 Total Depth of Well 120 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971
 Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy