

WELL LOG AND DRILLING REPORT

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

945656

WELL LOCATION

County Warren Township Wayne

Owner/Builder Susan Collins
(Circle One or Both) First Last

Address of Well Location 2247 Corwin Road
Number Street Name

City Oregonia Zip Code +4

Permit No. 104-2002 Section/Lot No. (Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well residential

N ☐ X ☐ +/- ft. or m


S ☐ Y ☐ +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:

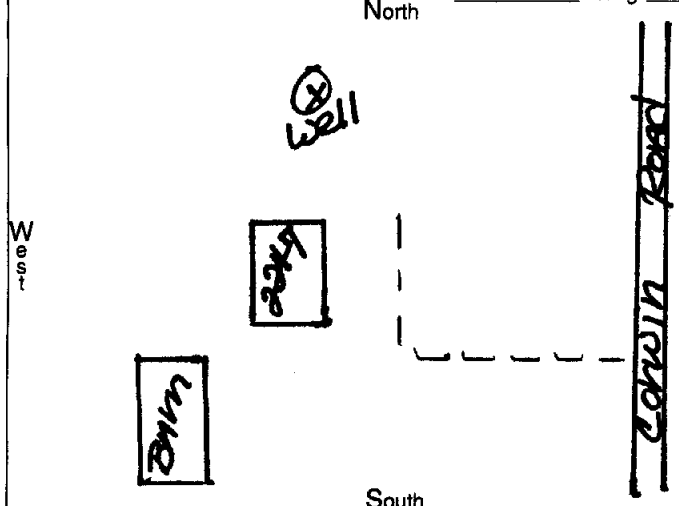

WELL TEST*

Pre-Pumping Static Level 15 ft. Date 12/02

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 10 gpm Duration of Test 2 hrs.

Feet of Drawdown 30 ft. Sustainable Yield 10 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality Clear

PUMP/PITLESS

Type of pump Submersible Capacity 10 gpm

Pump set at 95 ft. Pitless Type Dickens, TRS10.

Pump installed by Darby's Well Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Darby's Well Drilling

Address 2907 W. Enon Road

City, State, Zip Jenina, Ohio 45385

Signed Depten Darby Date 1/03

ODH Registration Number 269

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

☒ Borehole Diameter 6 5/2 inches Depth 100 ft.

Casing Diameter 6 in. Length 30 ft. Thickness .188 in.

☐ Borehole Diameter _____ inches Depth _____ ft.

Casing Diameter _____ in. Length _____ ft. Thickness _____ in.

Casing Height Above Ground 1-4 ft.

Type ☒ Steel ☐ Galv. ☐ PVC ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

☐ Joints ☐ Threaded ☒ Welded ☐ Solvent ☐ Other

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy