

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

945875

WELL LOCATION

CONSTRUCTION DETAILS

County Morgan Township Marion
Owner/Builder Rex Mayle
(Circle One or Both) First Last
Address of Well Location 503 East Buckeye Ridge
Number Street Name
City Stockport Zip Code +4 43787
Permit No. 292002 Section/Lot No. (Circle One or Both)
Location of Well in State Plane coordinates, if available: Use of Well Horse
N ☐ X ☐ +/- ft. or m
S ☐ Y ☐ +/- ft. or m
Elevation of Well +/- ft. or m
Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source
Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other
BOREHOLE/CASING (measured from ground surface)
1 ☐ Borehole Diameter 10" inches Depth 25' ft.
Casing Diameter 5" in. Length 125' ft. Thickness SPR21
2 ☐ Borehole Diameter 8" inches Depth 125' ft.
Casing Diameter 5" in. Length 125' ft. Thickness SPR21
Casing Height Above Ground 0 ft.
Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐
2 ☐ 2 ☐ 2 ☐ 2 ☐ Other
Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐
2 ☐ 2 ☐ 2 ☐ 2 ☐ Other

SCREEN

Diameter 5" Slot Size 3/16 Screen Length 40 ft.
Type PVC Material
Set Between 125 ft. and 80 ft.

GRAVEL PACK (Filter Pack)

Material/Size pea #8 Volume/Weight Used 2 1/2 ton
Method of Installation Gravity
Depth: Placed FROM 25 ft. TO 125 ft.

GROUT


Material Hole Plus Volume/Weight Used 17 Bags
Method of Installation Gravity
Depth: Placed FROM 25 ft. TO surface ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Light Brown Sandstone	1	30
Brown Sand Stone	30	33
Gray Slate	33	47
Coal Blossom	47	47 1/2
Gold Sand Stone	47 1/2	55
Gray Slate	55	64
Red Rock	64	67
Gray Slate	67	73
Lime - Hard	73	80
Gray Slate	80	88
Coal Clay mix	88	93
Gray Slate	93	97
Lime	97	101
Sand Stone	101	105
Lime & Slate mix	105	125
RR	125	

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:
North

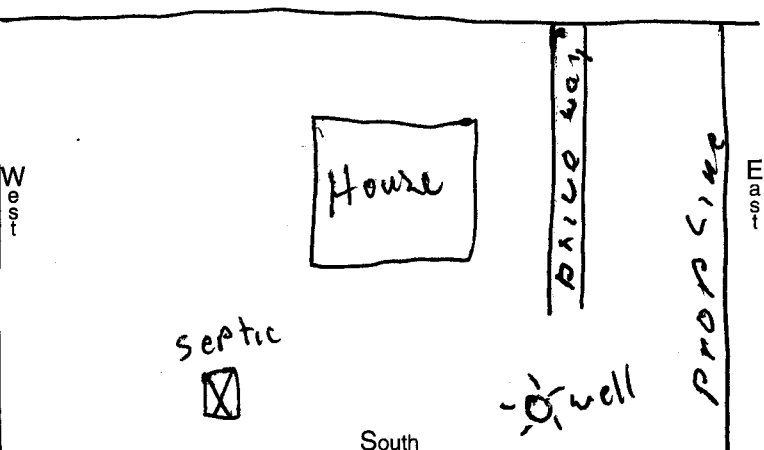

WELL TEST*

Pre-Pumping Static Level 24 ft. Date 12-12-02
Measured from: ☐ Top of Casing ☐ Ground Level ☐ Other
☐ Air ☒ Bailing ☐ Pumping* ☐ Other
Test Rate 15 gpm Duration of Test 8 hrs.
Feet of Drawdown 125 ft. Sustainable Yield 15 gpm
*(Attach a copy of the pumping test record, per section 1521.05, ORC)
Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☒ No
Quality Good

PUMP/PITLESS

Did not install
Type of pump Capacity gpm
Pump set at ft. Pitless Type
Pump installed by

I hereby certify the information given is accurate and correct to the best of my knowledge.
Drilling Firm CTR Water Well Drilling
Address 15 Schae Road
City, State, Zip Cowell Ohio 45744

Signed Vernon D. Tiller Date 12-12-02
ODH Registration Number 00262

*(If more space is needed to complete drilling log, use next consecutively numbered form.)
Date of Well Completion 12-12-02 Total Depth of Well 125 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.
ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971
Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy