

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

955564

WELL LOCATION

County Carroll Township Washington

Owner/Builder Dan Riggenbach
(Circle One or Both) First Last

Address of Well Location 3131 Mayham
Number Street Name

City Carrollton Zip Code +4 44615

Permit No. 135-03 Section/Lot No.
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well domestic

N ☐ X +/- ft. or m


S ☐ Y +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source

Source of Coordinates: ☐ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: Long:
North

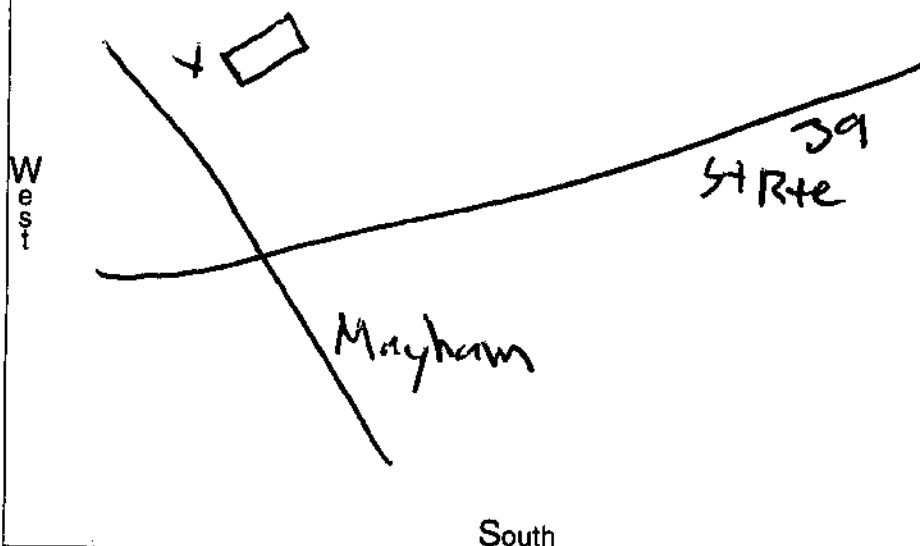

WELL TEST*

Pre-Pumping Static Level 90 ft. Date 12/03

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 25 gpm Duration of Test 1.5 hrs.

Feet of Drawdown 3.5 ft. Sustainable Yield 10 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality good

PUMP/PITLESS

Type of pump sub Capacity 10 gpm

Pump set at 125 ft. Pitless Type brass slide

Pump installed by Jones Drilling

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Jones Drilling

Address 6130 Waco

City, State, Zip Carrollton OH 44615

Signed K. D. Jones Date 2/25/05

ODH Registration Number 02606

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 8 5/8 inches Depth 37 ft.

Casing Diameter 6 7/8 in. Length 38 ft. Thickness 1.88 in.

2 ☐ Borehole Diameter 6.25 inches Depth 98 ft.

Casing Diameter 4.5 in. Length 120 ft. Thickness 2.14 in.

Casing Height Above Ground 1 ft.

Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐ Other

2 ☐ Threaded 2 ☒ Welded 2 ☐ Solvent 2 ☐ Other

Joints 1 ☐ Threaded 1 ☒ Welded 1 ☐ Solvent 1 ☐ Other

2 ☐ Threaded 2 ☐ Welded 2 ☒ Solvent 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material Benseal Volume/Weight Used 4/6 gal

Method of Installation Pressure Pumps

Depth: Placed FROM 37 ft. TO 1 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Brown Shale	0	25
Gray Shale	25	72
Dark Gray Shale	72	76
Broken Shale	76	85
Sandy Gray Shale	85	111
Dark Shale	111	135
water @ 71		
116		

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 12/03 Total Depth of Well 135 ft.

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy