

TYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARD

WELL LOG AND DRILLING REPORT

Ohio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

955565

WELL LOCATION

County Carroll Township East

Owner/Builder Larry Fechko
(Circle One or Both) First Last

Address of Well Location 5253 Bane Rd
Number Street Name

City Mechanicstown Zip Code +4 44651

Permit No. 26-04 Section/Lot No.
(Circle One or Both)

Location of Well in State Plane coordinates, if available: Use of Well domestic


N ☐ X +/- ft. or m
S ☐ Y +/- ft. or m

Elevation of Well 1115 +/- 62 ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation Source GPS

Source of Coordinates: ☒ GPS ☐ Survey ☐ Other

Sketch a map showing distance well lies from numbered state highways, street intersections, county roads, buildings or other notable landmarks. If latitude and longitude are available please include here: Lat: 40 09 07.5 Long: 080 58 083
North

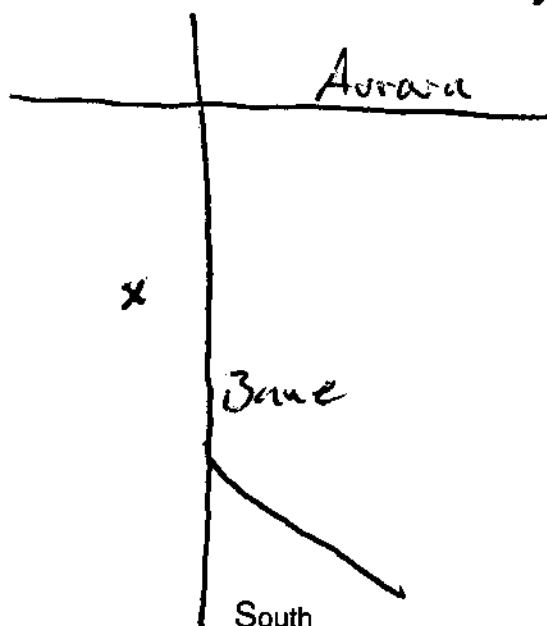

WELL TEST*

Pre-Pumping Static Level 37 ft. Date 5/04

Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other

☐ Air ☒ Bailing ☐ Pumping* ☐ Other

Test Rate 30 gpm Duration of Test 1 hrs.

Feet of Drawdown 10 ft. Sustainable Yield 25 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☒ No Flowing Well? ☐ Yes ☒ No

Quality good

PUMP/PITLESS

Type of pump sub Capacity 10 gpm

Pump set at 100 Pitless Type brass slide

Pump installed by Jones

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm Jones Drilling Co

Address 6130 Norco Rd

City, State, Zip Carrollton OH 44615

Signed K. Jones Date 2/10/05

ODH Registration Number 02606

CONSTRUCTION DETAILS

☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other

BOREHOLE/CASING (measured from ground surface)

1 ☐ Borehole Diameter 10 inches Depth 36 ft.
Casing Diameter 6 7/8 in. Length 38.5 ft. Thickness 2.58 in.

2 ☐ Borehole Diameter 6 inches Depth 84 ft.
Casing Diameter 4 in. Length 119 ft. Thickness 2.14 in.

Casing Height Above Ground 2.5 ft.

Type 1 ☐ Steel 1 ☐ Galv. 1 ☒ PVC 1 ☐
2 ☐ 2 ☐ 2 ☐ Other

Joints 1 ☐ Threaded 1 ☐ Welded 1 ☒ Solvent 1 ☐
2 ☐ 2 ☐ 2 ☐ Other

SCREEN

Diameter Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)

Material/Size Volume/Weight Used

Method of Installation

Depth: Placed FROM ft. TO ft.

GROUT

Material Benseal Volume/Weight Used 82.2 gal

Method of Installation pressure + pour + 100 lb

Depth: Placed FROM 36 ft. TO 0 ft.

DRILLING LOG*

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.
Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Sandy Brown Shale	0	30
Limestone	30	45
Sandy Brn Sh	45	72
Gray Shale	72	100
Gray Sandstone	100	125

water @ 50
100

*(If more space is needed to complete drilling log, use next consecutively numbered form.)

Date of Well Completion 5/04 Total Depth of Well 125 ft.