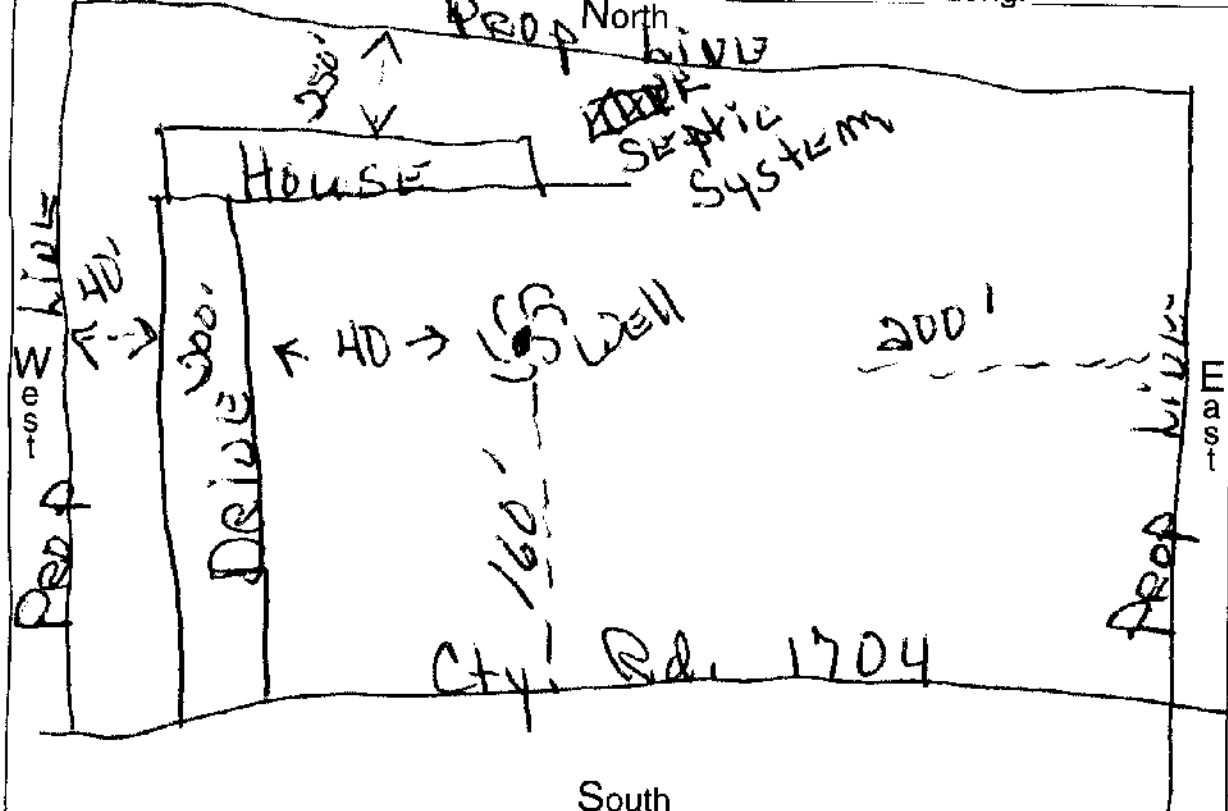


WELL LOG AND DRILLING REPORTTYPE OR USE PEN
SELF TRANSCRIBING
PRESS HARDOhio Department of Natural Resources
Division of Water, 1939 Fountain Square Drive
Columbus, Ohio 43224-9971 Voice (614) 265-6739 Fax (614) 447-9503

956964

WELL LOCATIONCounty Ashland Township MiltonOwner/Builder
(Circle One or Both)TERRY
FirstJORDON
LastAddress of
Well Location1114 Cty. Rd 1704
Number Street NameCity AshlandZip Code +4 4805Permit No. 3485Section/Lot No.
(Circle One or Both) 36Location of Well in State Plane
coordinates, if available:N ☐ X ☐ +/- ft. or mS ☐ Y ☐ +/- ft. or m

Elevation of Well +/- ft. or m

Datum Plain: ☐ NAD27 ☐ NAD83 Elevation SourceSource of Coordinates: ☐ GPS ☐ Survey ☐ OtherSketch a map showing distance well lies from numbered state highways, street
intersections, county roads, buildings or other notable landmarks. If latitude and
longitude are available please include here: Lat: Long:**WELL TEST***Pre-Pumping Static Level 25 ft. Date 08-07-04Measured from: ☒ Top of Casing ☐ Ground Level ☐ Other☐ Air ☐ Bailing ☒ Pumping* ☐ OtherTest Rate 30 gpm Duration of Test 2 hrs.Feet of Drawdown 30 ft. Sustainable Yield 30 gpm

*(Attach a copy of the pumping test record, per section 1521.05, ORC)

Is Copy Attached? ☐ Yes ☐ No Flowing Well? ☐ Yes ☐ NoQuality CLEAR**PUMP/PITLESS**

Type of pump Capacity gpm

Pump set at ft. Pitless Type S-ID PitlessPump installed by JERRY GARMAN

I hereby certify the information given is accurate and correct to the best of my knowledge.

Drilling Firm GARMAN DrillingAddress 20143 Cty. Rd. 1705City, State, Zip JEROMEVILLE, OH 44840Signed Jerry GarmanDate 08-07-04ODH Registration Number 656**CONSTRUCTION DETAILS**☐ Rotary ☒ Cable ☐ Augered ☐ Driven ☐ Other**BOREHOLE/CASING** (measured from ground surface)1 ☐ Borehole Diameter 5 inches Depth 23 ft.Casing Diameter 5 in. Length 44 ft. Thickness 9/8 in.2 ☐ Borehole Diameter inches Depth ft.

Casing Diameter in. Length ft. Thickness in.

Casing Height Above Ground 4 1/2 ft.Type 1 ☒ Steel 1 ☐ Galv. 1 ☐ PVC 1 ☐2 ☐ Steel 2 ☐ Galv. 2 ☐ PVC 2 ☐ OtherJoints 1 ☒ Threaded 1 ☐ Welded 1 ☐ Solvent 1 ☐2 ☐ Threaded 2 ☐ Welded 2 ☐ Solvent 2 ☐ Other**SCREEN**Diameter NONE Slot Size Screen Length ft.

Type Material

Set Between ft. and ft.

GRAVEL PACK (Filter Pack)Material/Size NONE Volume/Weight Used 900 lbsMethod of Installation DRILLER

Depth: Placed FROM ft. TO ft.

GROUTMaterial BENITE Volume/Weight Used 200 lbsMethod of Installation DRILLERDepth: Placed FROM 44 ft. TO SURFACE ft.**DRILLING LOG***

INDICATE DEPTH(S) AT WHICH WATER IS ENCOUNTERED.

Show color, texture, hardness, and formation:
sandstone, shale, limestone, gravel, clay, sand, etc.

	From	To
Topsoil	0	4
BROWN CLAY	4	20
BROWN SHALE	20	40
GREY SHALE SANDY SHALE	40	70
WATER	70	23

Completion of this form is required by section 1521.05, Ohio Revised Code - file within 30 days after completion of drilling.

ORIGINAL COPY TO - ODNR, DIVISION OF WATER, 1939 FOUNTAIN SQ. DRIVE, COLS., OHIO 43224-9971

Blue - Customer's copy Pink - Driller's copy Green - Local Health Dept. copy